



Powerline harmonic noise in MRS data cancellation by sinusoidal subtraction An efficient solution to cancel powerline interferences

Sébastien Penz, Jean-François Girard

► To cite this version:

Sébastien Penz, Jean-François Girard. Powerline harmonic noise in MRS data cancellation by sinusoidal subtraction An efficient solution to cancel powerline interferences. Colloque Geofcan 2014, Nov 2014, Orsay, France. 2014. hal-01080987

HAL Id: hal-01080987

<https://brgm.hal.science/hal-01080987>

Submitted on 6 Nov 2014

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Powerline harmonic noise in MRS data cancellation by sinusoidal subtraction



S. Penz, J.F. Girard.

BRGM, 3 av. Claude Guillemin, BP 36009, 45060 Orléans Cedex 2

The surface magnetic resonance method (SNMR) is a valuable technique for hydrogeological studies, since it provides information on the porosity, hydraulic conductivity and water content. However the bad signal-to-noise ratio often encountered limits its application range. In particular, in suburban areas, strong powerline harmonics severely degrade the SNMR signals.

The powerline fundamental frequency is subject to small variations in time that make high order harmonics filtering difficult using a classical notch filter without distorting the MRS signal. Harmonics cancellation using sinusoidal subtraction is an alternative, but requires a high accuracy of the instantaneous fundamental frequency value to be efficient. The power grid frequency being regulated we expect that the instantaneous frequency could be monitored with a good S/N ratio using a remote frequencymeter, synchronised with the SNMR device, and later used for processing. Based on this accurate instantaneous frequency measurement we developed a processing method based on the subtraction of a powerline harmonics model of constant amplitudes. We performed numerical experiments to quantify the efficiency of this method, and compare it with classical notch or multi-channel filtering.

Studying real noise measurements, we encountered cases where harmonics amplitudes do not remains stable over time. We therefore proposed a processing method that include time-variant amplitudes in the powerline harmonics model. Amplitudes are modeled using a b-spline decomposition and estimated through an inversion procedure. A test on synthetic data is presented to assess the theoretical applicability of the method.

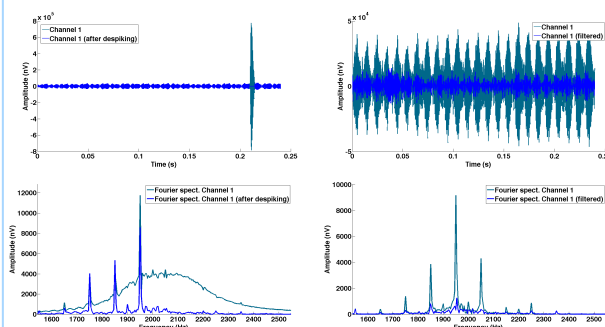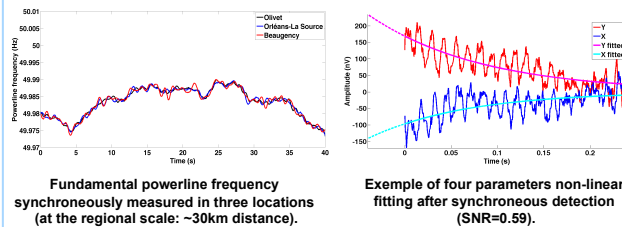

	E_0 (nV)	T_2 (ms)	f_0 (Hz)	ϕ (rad)	SNR
Model	300	120	2045.1	2	
Pure stacking	314.1	112.3	2045.20	1.91	0.79300
Despiking	289.4	120.1	2045.07	2.04	0.97105
Despiking + Notch	170.1	120.2	2044.09	2.65	0.98102
Multichannel filter	264.2	121.5	2044.96	2.09	0.95555
Despiking + Multichannel filter	254.4	124.4	2044.95	2.10	0.97105
Despiking + Sinusoidal sub.	267.8	127.1	2045.07	2.02	0.98811

	E_0 (nV)	T_2 (ms)	f_0 (Hz)	ϕ (rad)	SNR
Model	300	120	2045.1	2	
Pure stacking	415.1	81.9	2045.44	1.67	0.11473
Despiking	325.8	106.4	2044.95	2.15	0.59466
Despiking + Notch	199.4	108.9	2044.09	2.63	0.77353
Multichannel filter	266.5	121.3	2044.92	2.11	0.11473
Despiking + Multichannel filter	274.1	117.0	2044.91	2.11	0.59466
Despiking + Sinusoidal sub.	276.1	123.9	2045.04	2.03	0.72472

	E_0 (nV)	T_2 (ms)	f_0 (Hz)	ϕ (rad)	SNR
Model	300	120	2045.1	2	
Pure stacking	678.6	500000000.0	2038.29	2.14	0.00500
Despiking	254.5	381.1	2051.87	0.05	0.05643
Despiking + Notch	395.3	63.8	2043.69	2.81	0.13366
Multichannel filter	264.6	117.0	2044.62	2.27	0.00500
Despiking + Multichannel filter	361.5	91.3	2044.52	2.31	0.05643
Despiking + Sinusoidal sub.	301.4	117.2	2044.84	2.11	0.09182

Comparison of synthetic signal parameters retrieval: the signal is made of a synthetic signal embedded in real noise measurements. 499 stacks are used. The same noise measurements are used for the three cases with different noise amplification. a) amplification=5; b) amplification=25; c) amplification=25. Noise was measured using ADU-07 RMT stations (Metronix) at a noisy site in Lailly en Val (45). The case c) exhibit mean signal amplitudes two time stronger than those recorded at the same site with a Numis poly (Iris Instrument) using a 37.5m, 2 turns square loop. The post-processing signal to noise ratio estimates is estimated as follows: $SNR = \sum_k MRS(k)^2 / \sum_k (S(k) - MRS(k))^2$.

Harmonic model sinusoidal subtraction

The signal recorded in the reception channel can be described by the model:

$$S(t) = MRS(t) + H(t) + spikes(t) + N(t)$$

The powerline interference component of this model takes the abusive form:

$$H(t) = \sum_n h_n(t) = \sum_n A_n \cos(2\pi n f_f t + \phi_n), \text{ where } f_f \text{ is the powerline instantaneous frequency.}$$

After spikes removal, using the measured powerline frequency, phase and amplitudes of each harmonic is determined using the cross correlation with a reference sinusoid at the harmonic frequency. The complete harmonic model is later reconstructed as follows:

$$H(t) = \sum_n A_n \cos(2\pi n f_f(t) t + \phi_n + \Delta\phi_n(t)), \text{ with } \Delta\phi_n(t) = \int_0^t 2\pi n \frac{f_f(u) - f_f}{f_f} du \text{ the phase delay due}$$

to the fundamental frequency variation. The harmonic model $H(t)$ is further subtracted to the signal $S(t)$, and the remaining noise can be cancelled by a multichannel filter and/or a stacking procedure.


Inversion method to fit time-variant amplitudes

In order to find a better solution for the case of harmonic amplitudes significantly changing over a stack length, we define a new harmonic model:

$$H'(t) = \sum_n A_n(t) \cos(2\pi n f_f t + \phi_n), \text{ where } A_n(t) = \sum_m a_m B_m^{n-1}(t).$$

Each harmonic amplitude is defined as a linear combination of n b-splines functions. The $m \times n$ parameters a can be estimated solving a linear inverse problem. This problem consists in minimizing the following cost function:

$$\Phi = \frac{1}{2} \|S - H\|^2 + \frac{1}{2} \beta \|Cp\|^2 + \frac{1}{2} \gamma \|I(p - p_0)\|^2, \text{ where } p \text{ are logarithmic parameters, } C \text{ a smoothing operator and } I \text{ a damping operator.}$$



An efficient solution to cancel powerline interferences

> Measurements of the fundamental powerline frequency is the key for a good sinusoidal subtraction

- Signal parameters are better recovered even with a high noise level
- Time variant harmonics amplitude inversion is promising
- Performance of filtering combination strategies remains to be evaluated on a large site database

> GPS synchronisation of SNMR devices would allow direct application of this method

Acknowledgment: This work was partly funded through the french national research project CRITEX.

Contact

Girard Jean-Francois
BRGM Orléans
DGR/REG
jf.girard@brgm.fr

www.brgm.fr