



HAL
open science

Electrolytically supported processes of capture and release of CO₂

Chérif Morcos, Alain Seron, Romain Rodrigues, Ioannis Ignatiadis, Théodore Tzedakis, Stéphanie Betelu

► **To cite this version:**

Chérif Morcos, Alain Seron, Romain Rodrigues, Ioannis Ignatiadis, Théodore Tzedakis, et al.. Electrolytically supported processes of capture and release of CO₂. Euroclay 2019, Jul 2019, Paris, France. hal-02095246

HAL Id: hal-02095246

<https://brgm.hal.science/hal-02095246>

Submitted on 10 Apr 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Electrolytically supported processes of capture and release of CO₂

**Chérif Morcos^{1,2}, Alain Seron¹, Romain Rodrigues¹, Ioannis Ignatiadis¹,
Theodore Tzedakis², Stéphanie Betelu^{1,*}**

¹BRGM, 3 avenue Claude Guillemin, 45060 Orléans Cedex 02, France

²LGC, UMR-CNRS-5503. 118, route de Narbonne, 31062 Toulouse Cedex 9, France

[*s.betelu@brgm.fr](mailto:s.betelu@brgm.fr)

CO₂ capture and valorisation are, according to present knowledge, possible solutions, involving economic and industrial challenges, for reducing atmospheric CO₂ emissions. Although chemisorption using amine-based solvents (MEA) is the farthest advanced in terms of industrial development (performances: 0.4 tCO₂/t_{MEA}; energy cost: 1-3GJ/tCO₂), various obstacles to its use must be overcome. Notably health and environmental risks associated with the use and handling of amines must be duly specified and verified for industrial-scale facilities. Given this two-fold challenge, both economic and environmental, the development of alternative eco-compatible and efficient processes is crucial for cost-effective post-combustion CO₂ capture/release.

This research aims at developing a powerful technological breakthrough in the CO₂ capture (Fig. 1A), using Layered Double Hydroxides (LDHs) that have a strong affinity for CO₃²⁻. The electrochemical control of the oxidation state of the multiple valence cations, constituting the lamellar sheets, is the core process, which also includes CO₂ dissolution reaction to CO₃²⁻ from the gas effluent, as well as, after capture and release of CO₃²⁻, the CO₂ degassing from released CO₃²⁻.

Synthesis and formulation of chemically co-precipitated Co-based LDH was optimized to perform electrochemical cycling according to:

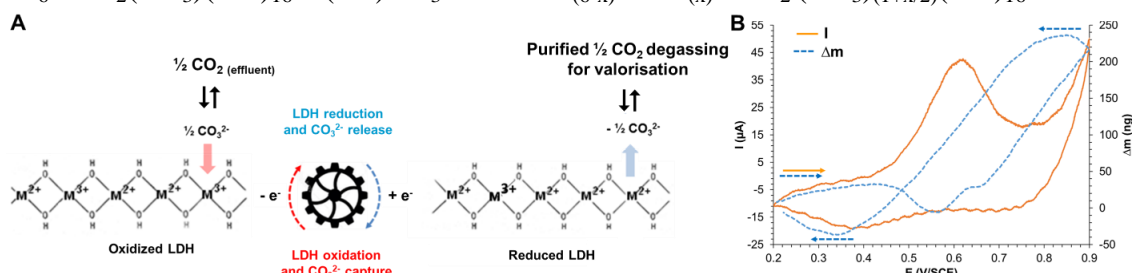



Fig. 1: A. Electrolytically supported processes of capture and release of CO₃²⁻ using LDHs. B: Coupling of CV and QCM, using thin LDHs films, coated on platinum-based quartz electrodes.

The coupling of Cyclic Voltammetry (CV) and Quartz Crystal Microbalance (QCM), using thin LDHs films, coated on platinum-based quartz electrodes (Fig 1B) enabled to (i) investigate the concomitant redox reactions and mass variations, (ii) demonstrate CO₃²⁻ intercalation/deintercalation and (iii) determine the involved mechanisms. Using LDHs slurries, chronocoulometry, and chemical and physical analyses enabled to determine the kinetics constants associated to the concomitant electrochemical and chemical phenomena. The electrical electrolysis cell consumption of the CO₂ capture/release was evaluated via the applied current and the operating cell-voltage.

Preferred format: Oral
Session number and name: D2