



# Combined use of Sentinel-1 and SMOS data with the BSS subsurface database to better estimate the shrink-swell hazard in Southwestern France

André Burnol, Hideo Aochi, Daniel Raucoules, Koudogbo Fifamè, Alfio Fumagalli, Christophe Maisons

## ► To cite this version:

André Burnol, Hideo Aochi, Daniel Raucoules, Koudogbo Fifamè, Alfio Fumagalli, et al.. Combined use of Sentinel-1 and SMOS data with the BSS subsurface database to better estimate the shrink-swell hazard in Southwestern France. Living Planet Symposium, May 2019, Milan, Italy. , 2019.  
hal-02102874


HAL Id: hal-02102874

<https://brgm.hal.science/hal-02102874>

Submitted on 24 Jun 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

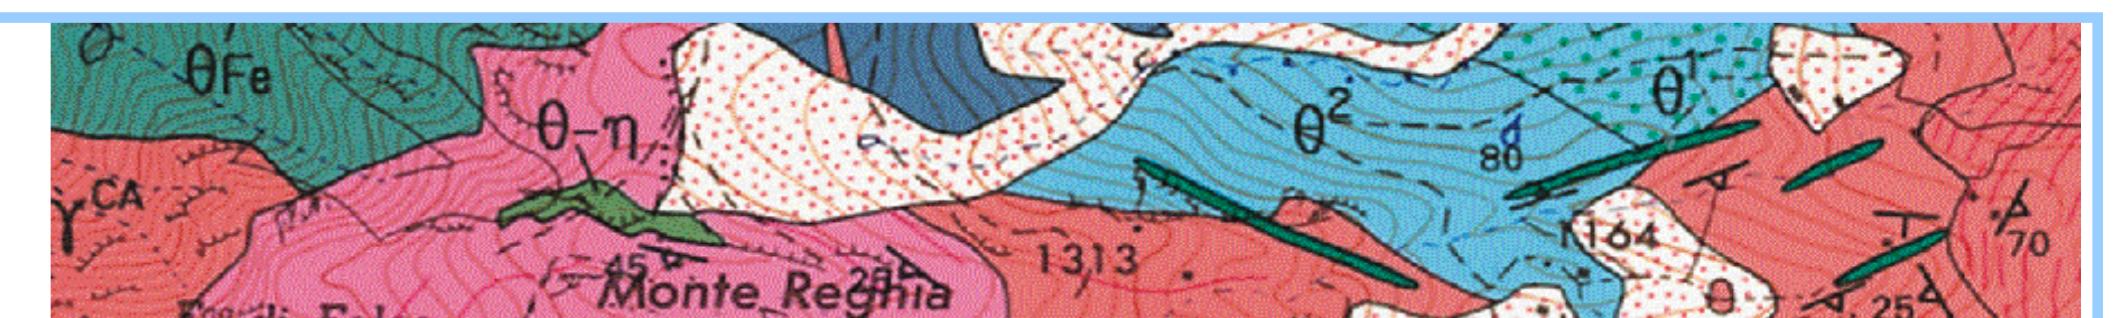

# Combined use of Sentinel-1 and SMOS data with the BSS subsurface database to better estimate the shrink-swell hazard in Southwestern France

**André Burnol<sup>(1)</sup>, Aochi H.<sup>(1)</sup>, Raucoules D.<sup>(1)</sup>, Koudogbo F.<sup>(2)</sup>, Fumagalli A.<sup>(2)</sup>, Chiquet P.<sup>(3)</sup>, Maisons C.<sup>(4)</sup>**

(1) BRGM, Orléans, France (2) TRE-ALTAMIRA, Barcelona, Spain (3) TEREGA, Pau, France (4) MAGNITUDE, Sainte-Tulle, France


## Two main questions:

- (1) Are the local displacements detected by Sentinel-1 strongly related to the **underground gas storage operations?**
- (2) Can the DInSAR processing and SMOS data be coupled to assess locally the **shrink/swell hazard in Southwestern France?**


### Sentinel-1 data and mechanical modeling

Table S1: Sentinel-1 and SqueeSAR® parameters	
Track number	8
Geometry	Descending
# of images	115
Time period	18/10/2014-26/10/2017
Look angle 0 (°)	37.97°
Azimuth angle δ (°)	8.19°
Number of measurement points (MP)	1931
Area	87.5 km <sup>2</sup>
Measurement point density	22.1 MP/km <sup>2</sup>
Coordinate reference system	NTF (Paris) Lambert Zone III
Reference point	X coordinate: 389548.84 Y coordinate: 3165408.00

Table S2: Mechanical model parameters	
Parameter	Quantity and Unit
Poisson ratio $\nu$	0.3
Medium rigidity $\mu$	8 GPa
Biot's coefficient $\alpha$	0.9
Lussagnet reservoir (surface S, top depth $h_t$ , bottom depth $h_b$ )	(5.4 km <sup>2</sup> , 550 m, 715 m)
Pressure change $\Delta P$ in Lussagnet reservoir	20 bar
Izaute reservoir (surface S, top depth $h_t$ , bottom depth $h_b$ )	(13.1 km <sup>2</sup> , 510 m, 590 m)
Pressure change $\Delta P$ in Izaute reservoir	15 bar

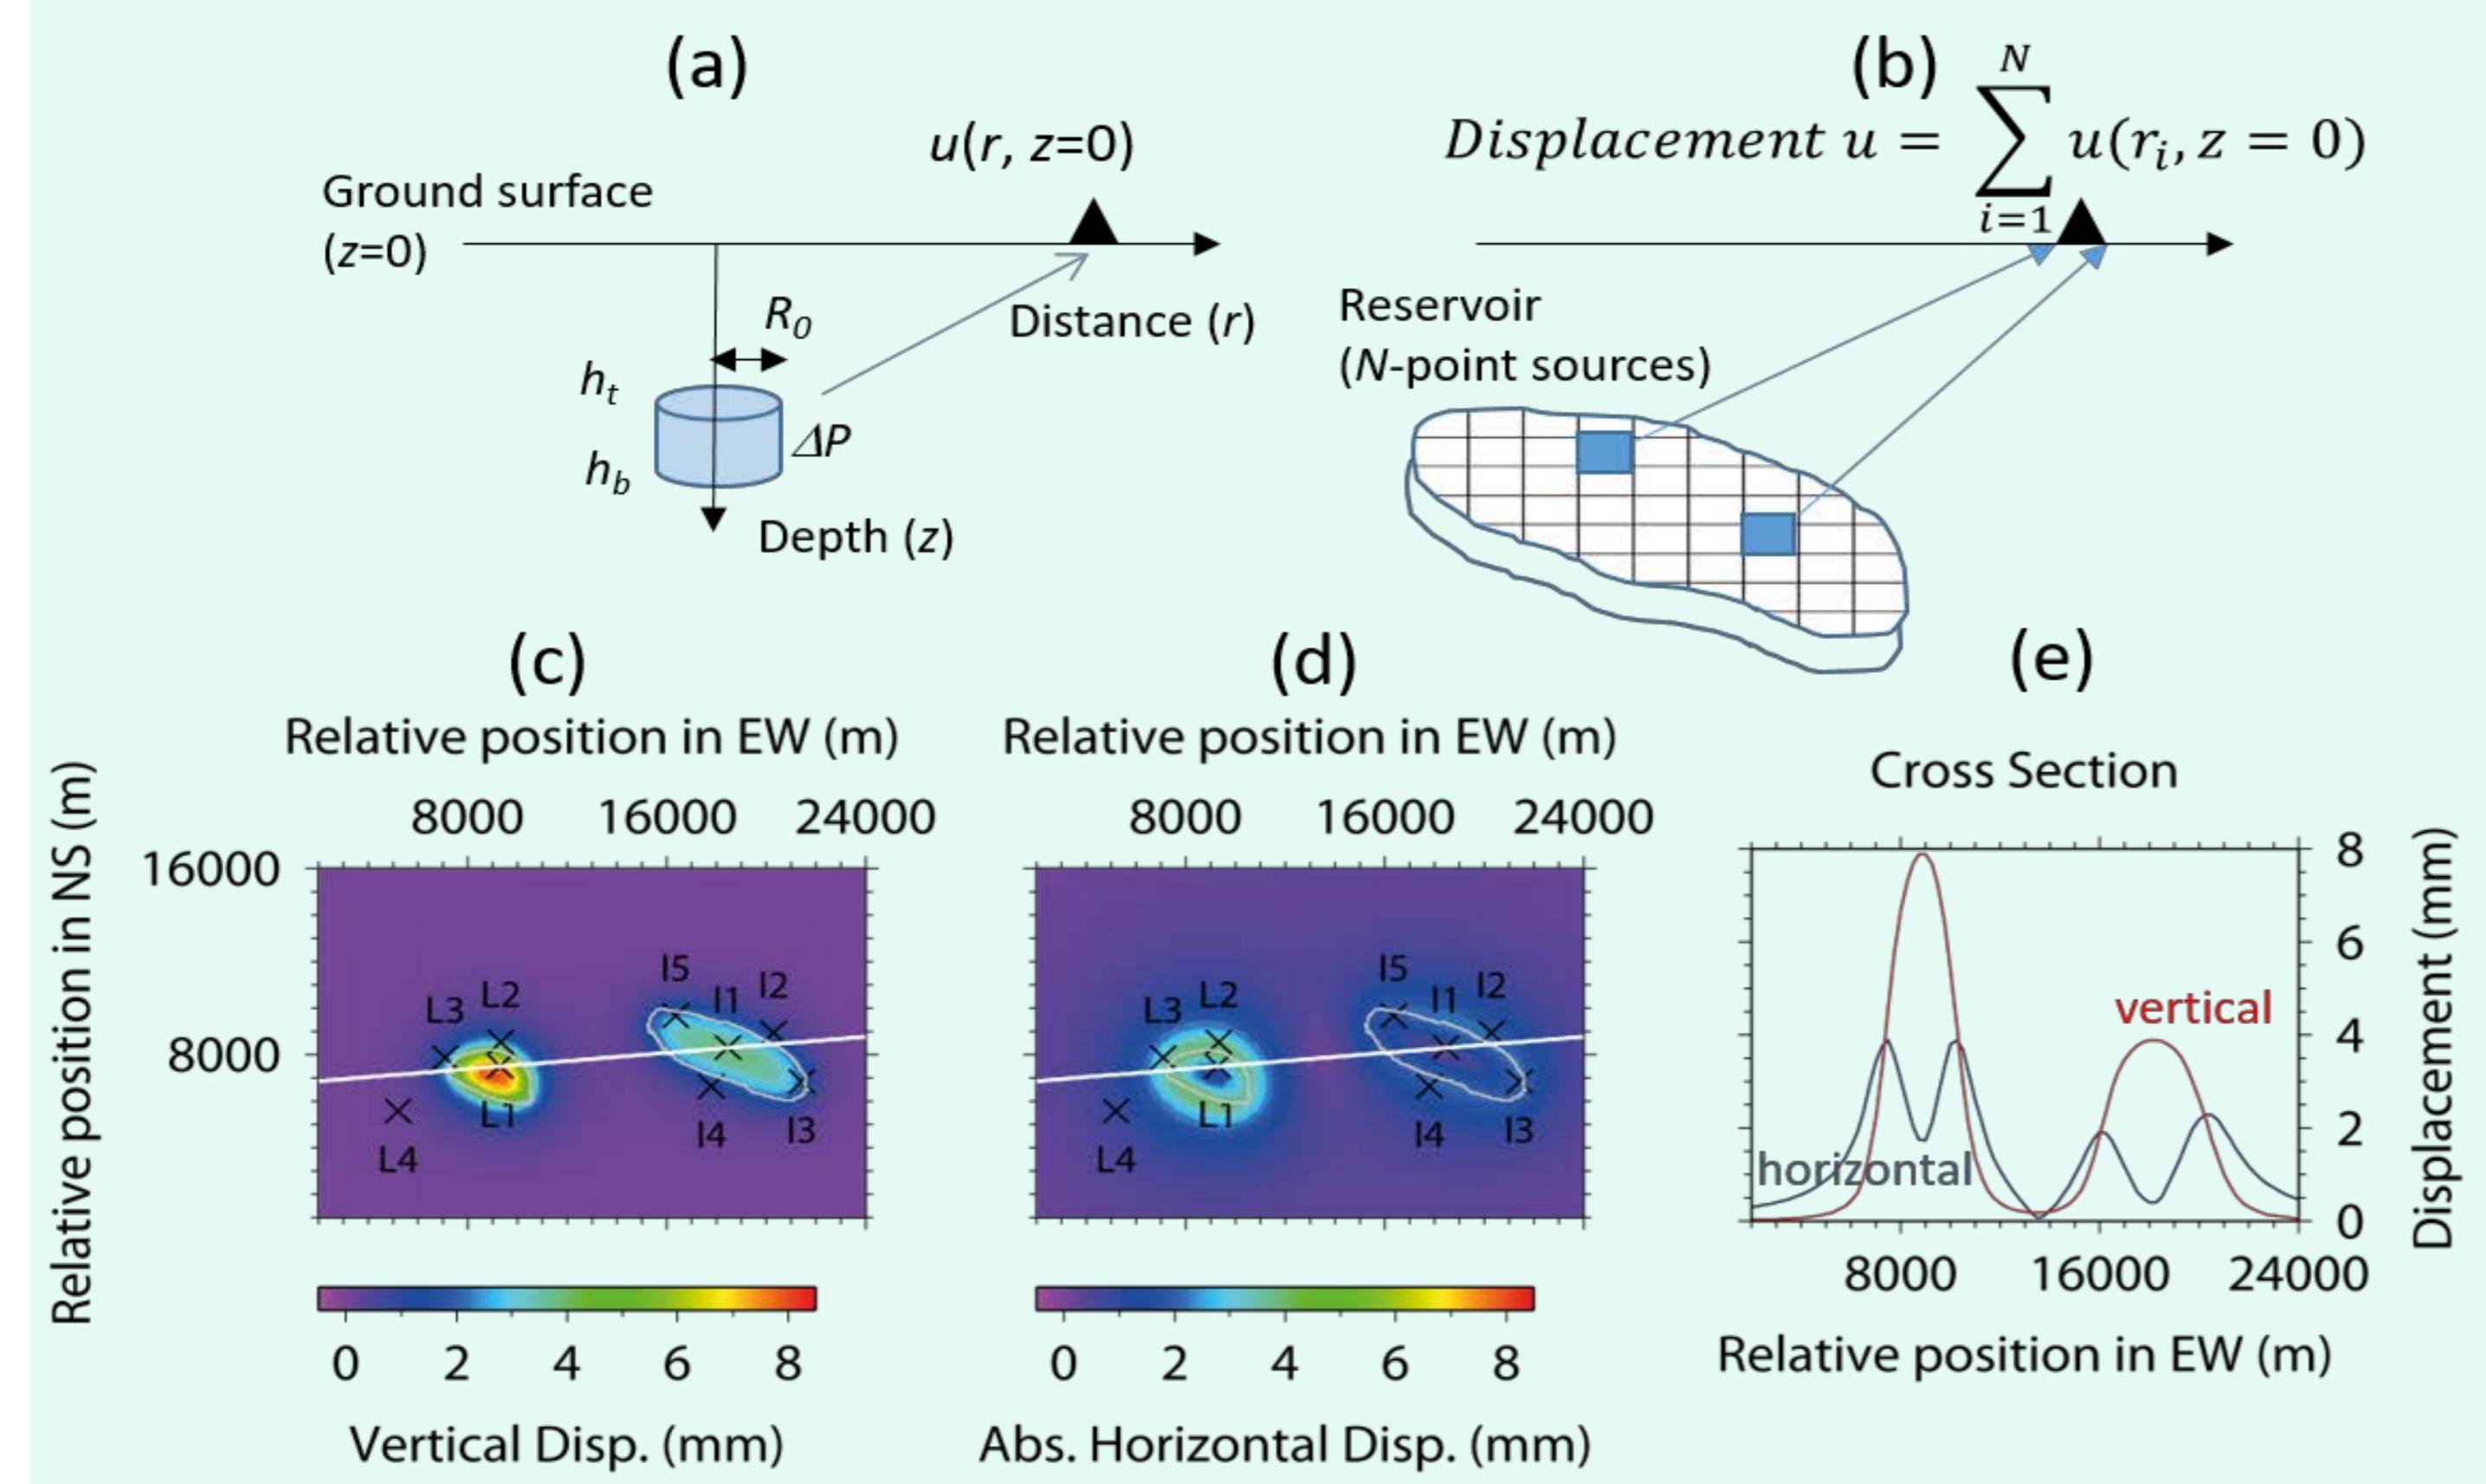


### Wavelet-based analysis of LOS displacement using hydraulic data


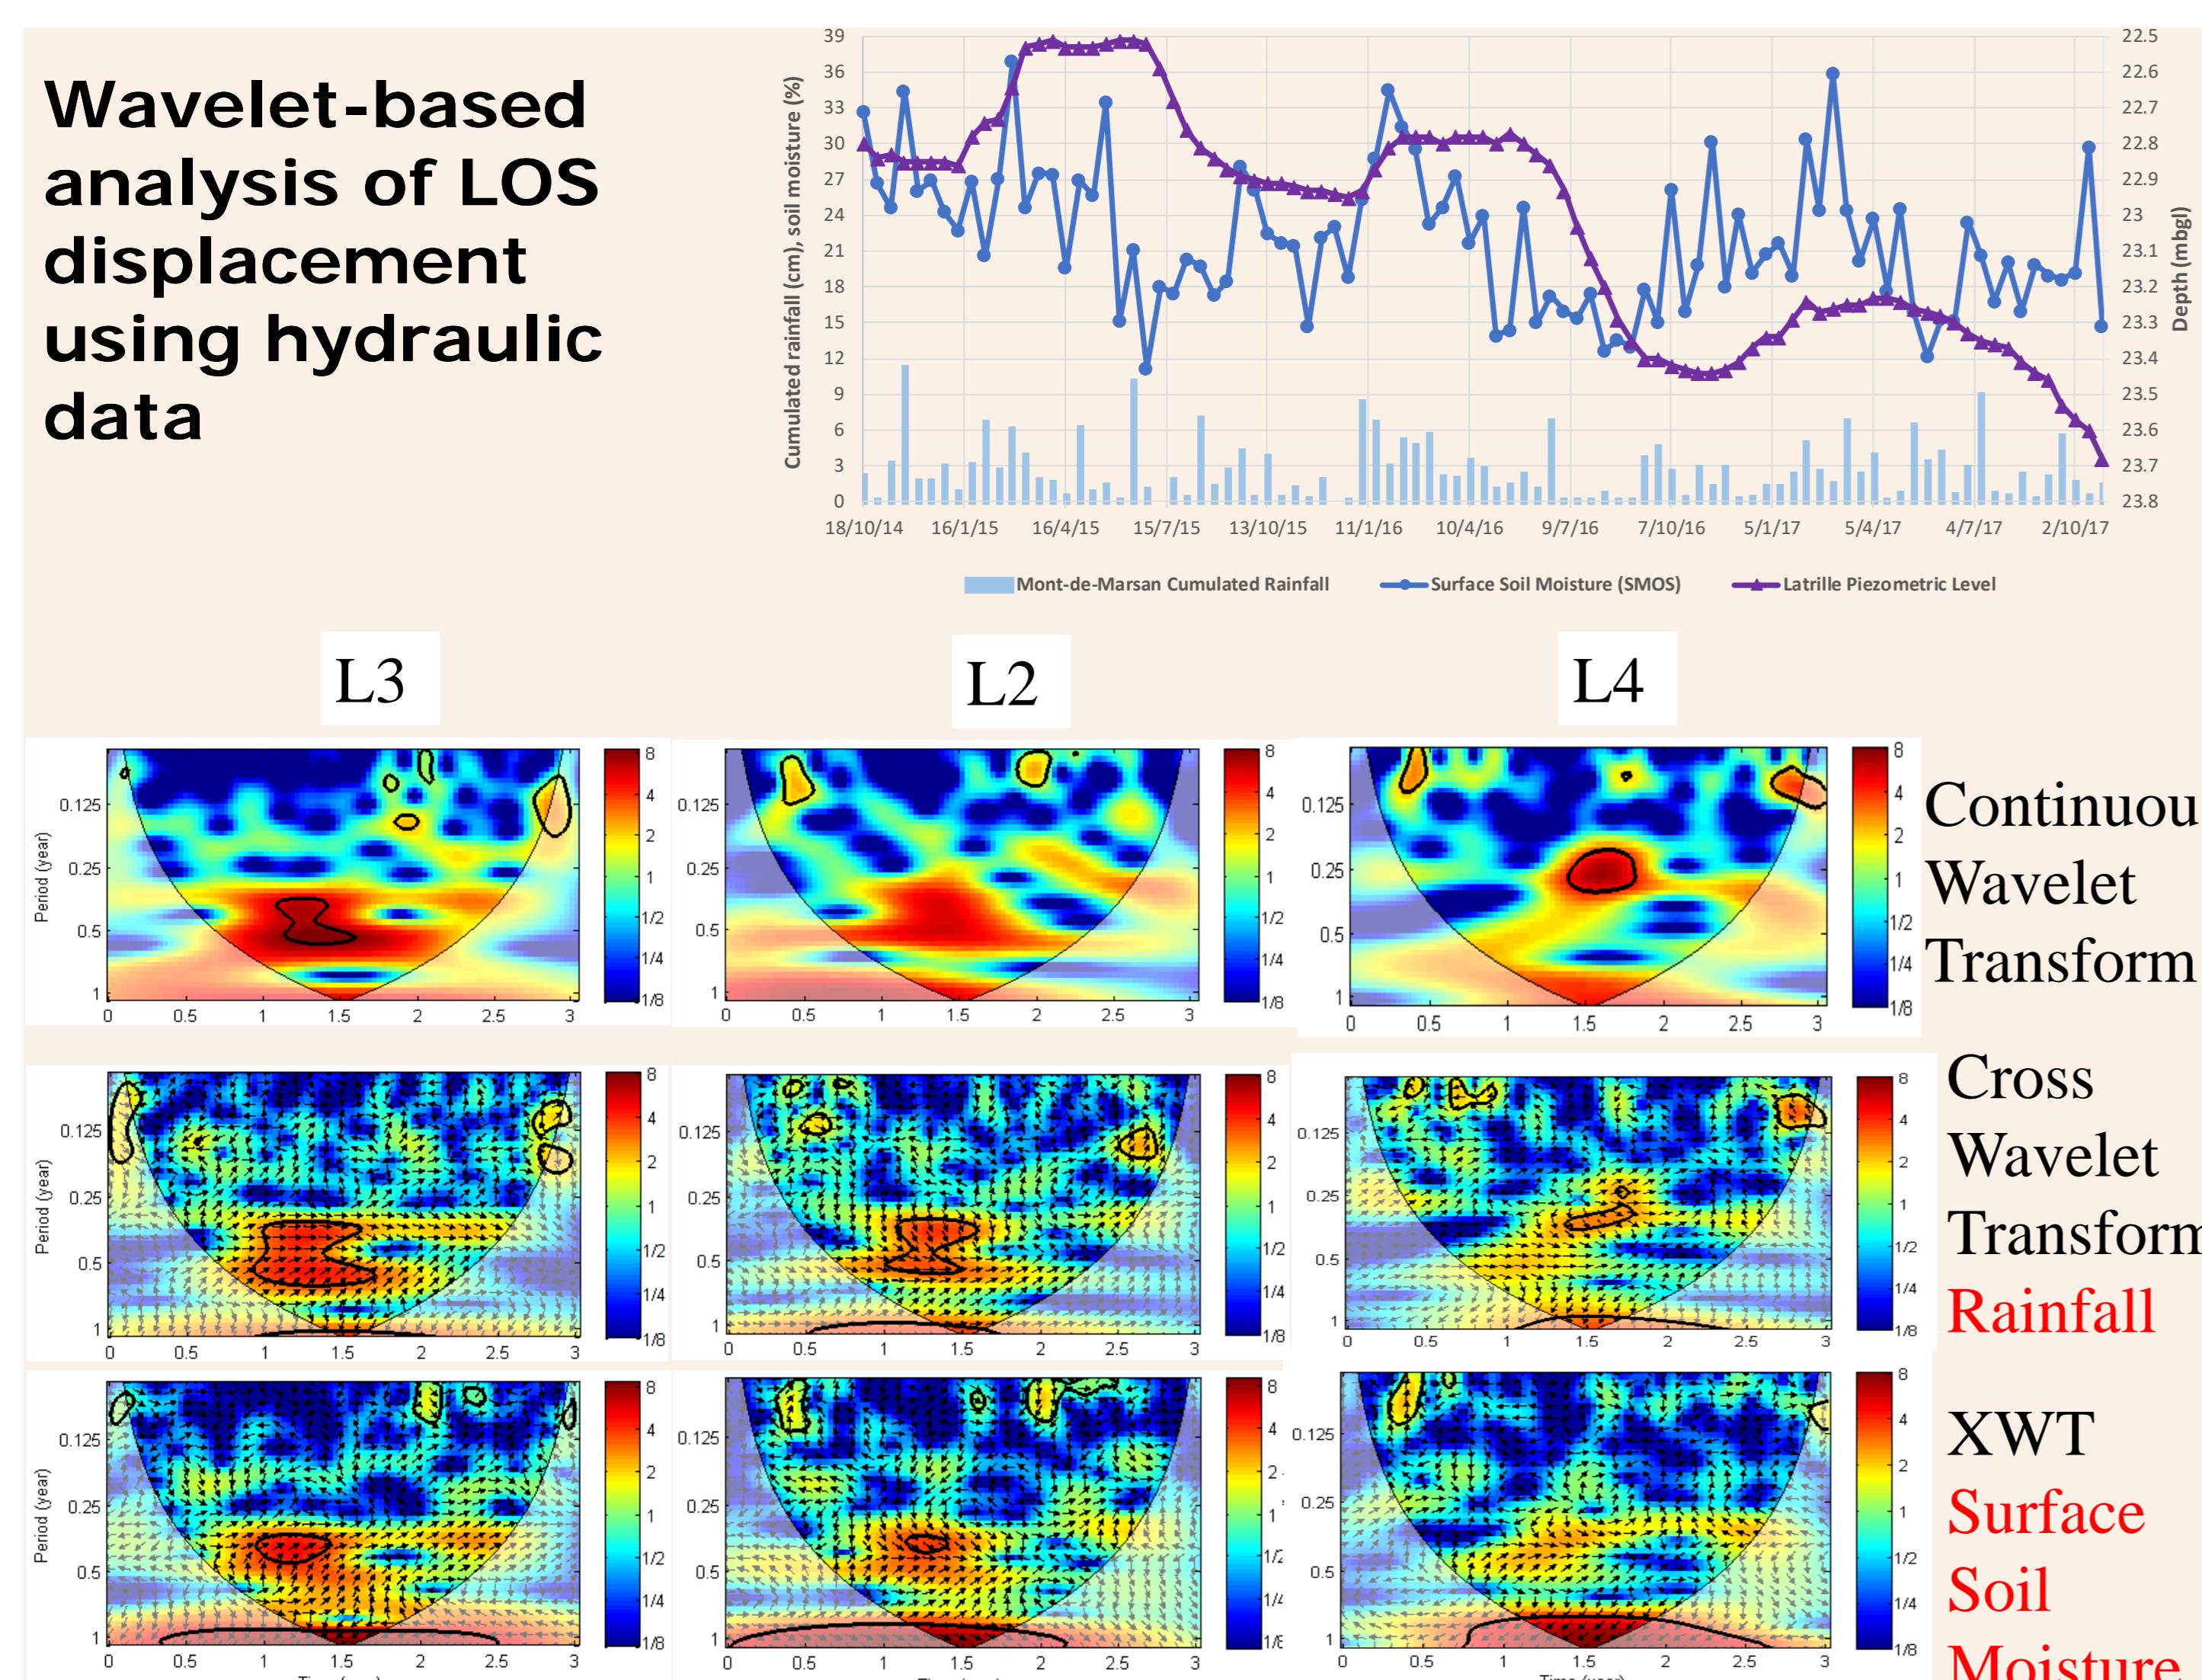


In the top, the continuous wavelet transform (CWT) of the mean LOS displacements is shown at 3 monitoring wells of Lussagnet: (a) L3, (b) L2, (c) L4. In the middle, the cross wavelet transform (XWT) of the cumulated rainfall and the LOS displacement at three monitoring wells is shown. The thick contour designates the 5% significant level against red noise. The cone of influence (COI) where edge effects might distort the picture is shown as a lighter shadow. The relative phase relationship is shown as arrows, with in-phase pointing right and anti-phase pointing left and the rainfall/SSM leading by 90° pointing straight down.


### Lussagnet monitoring wells

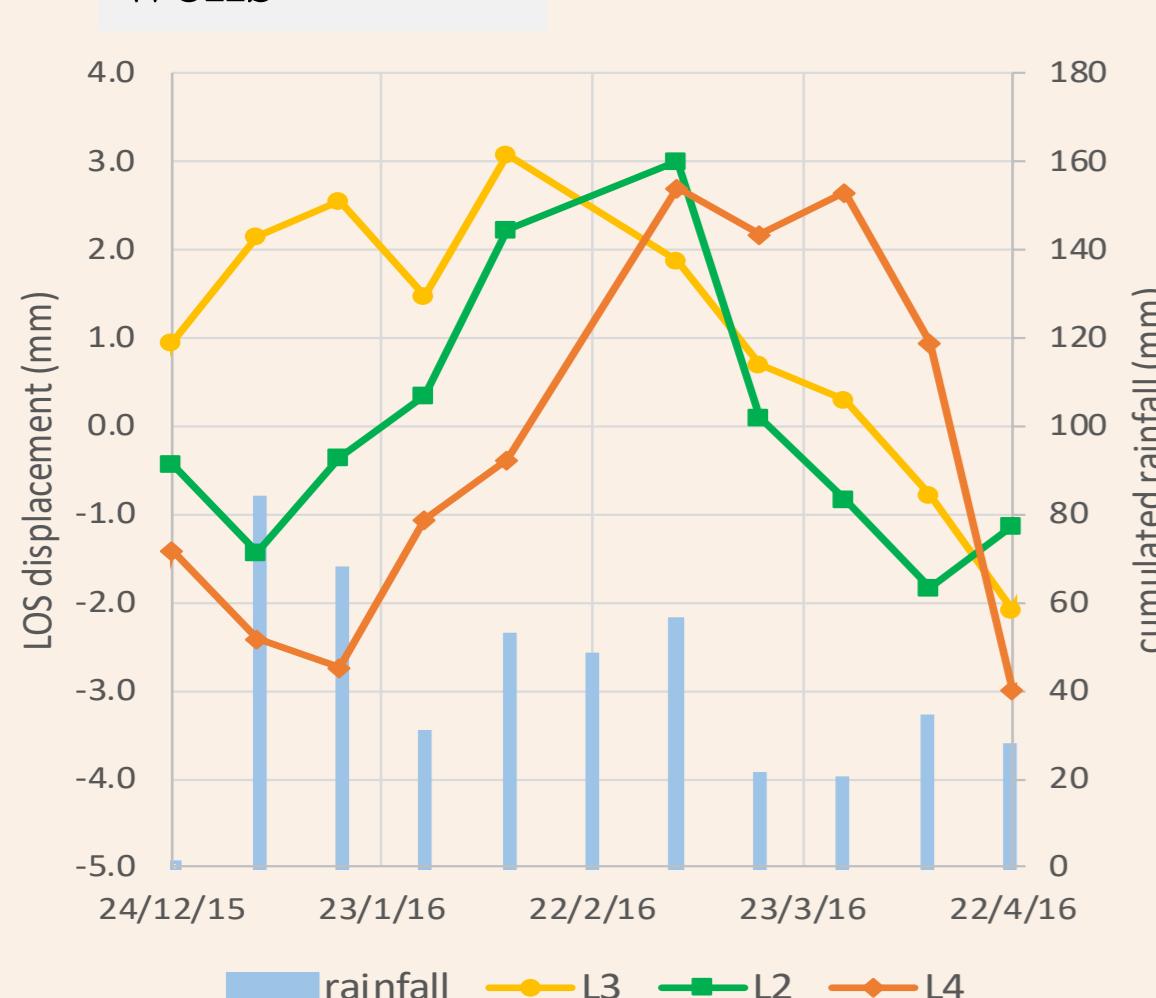

### Izaute monitoring wells

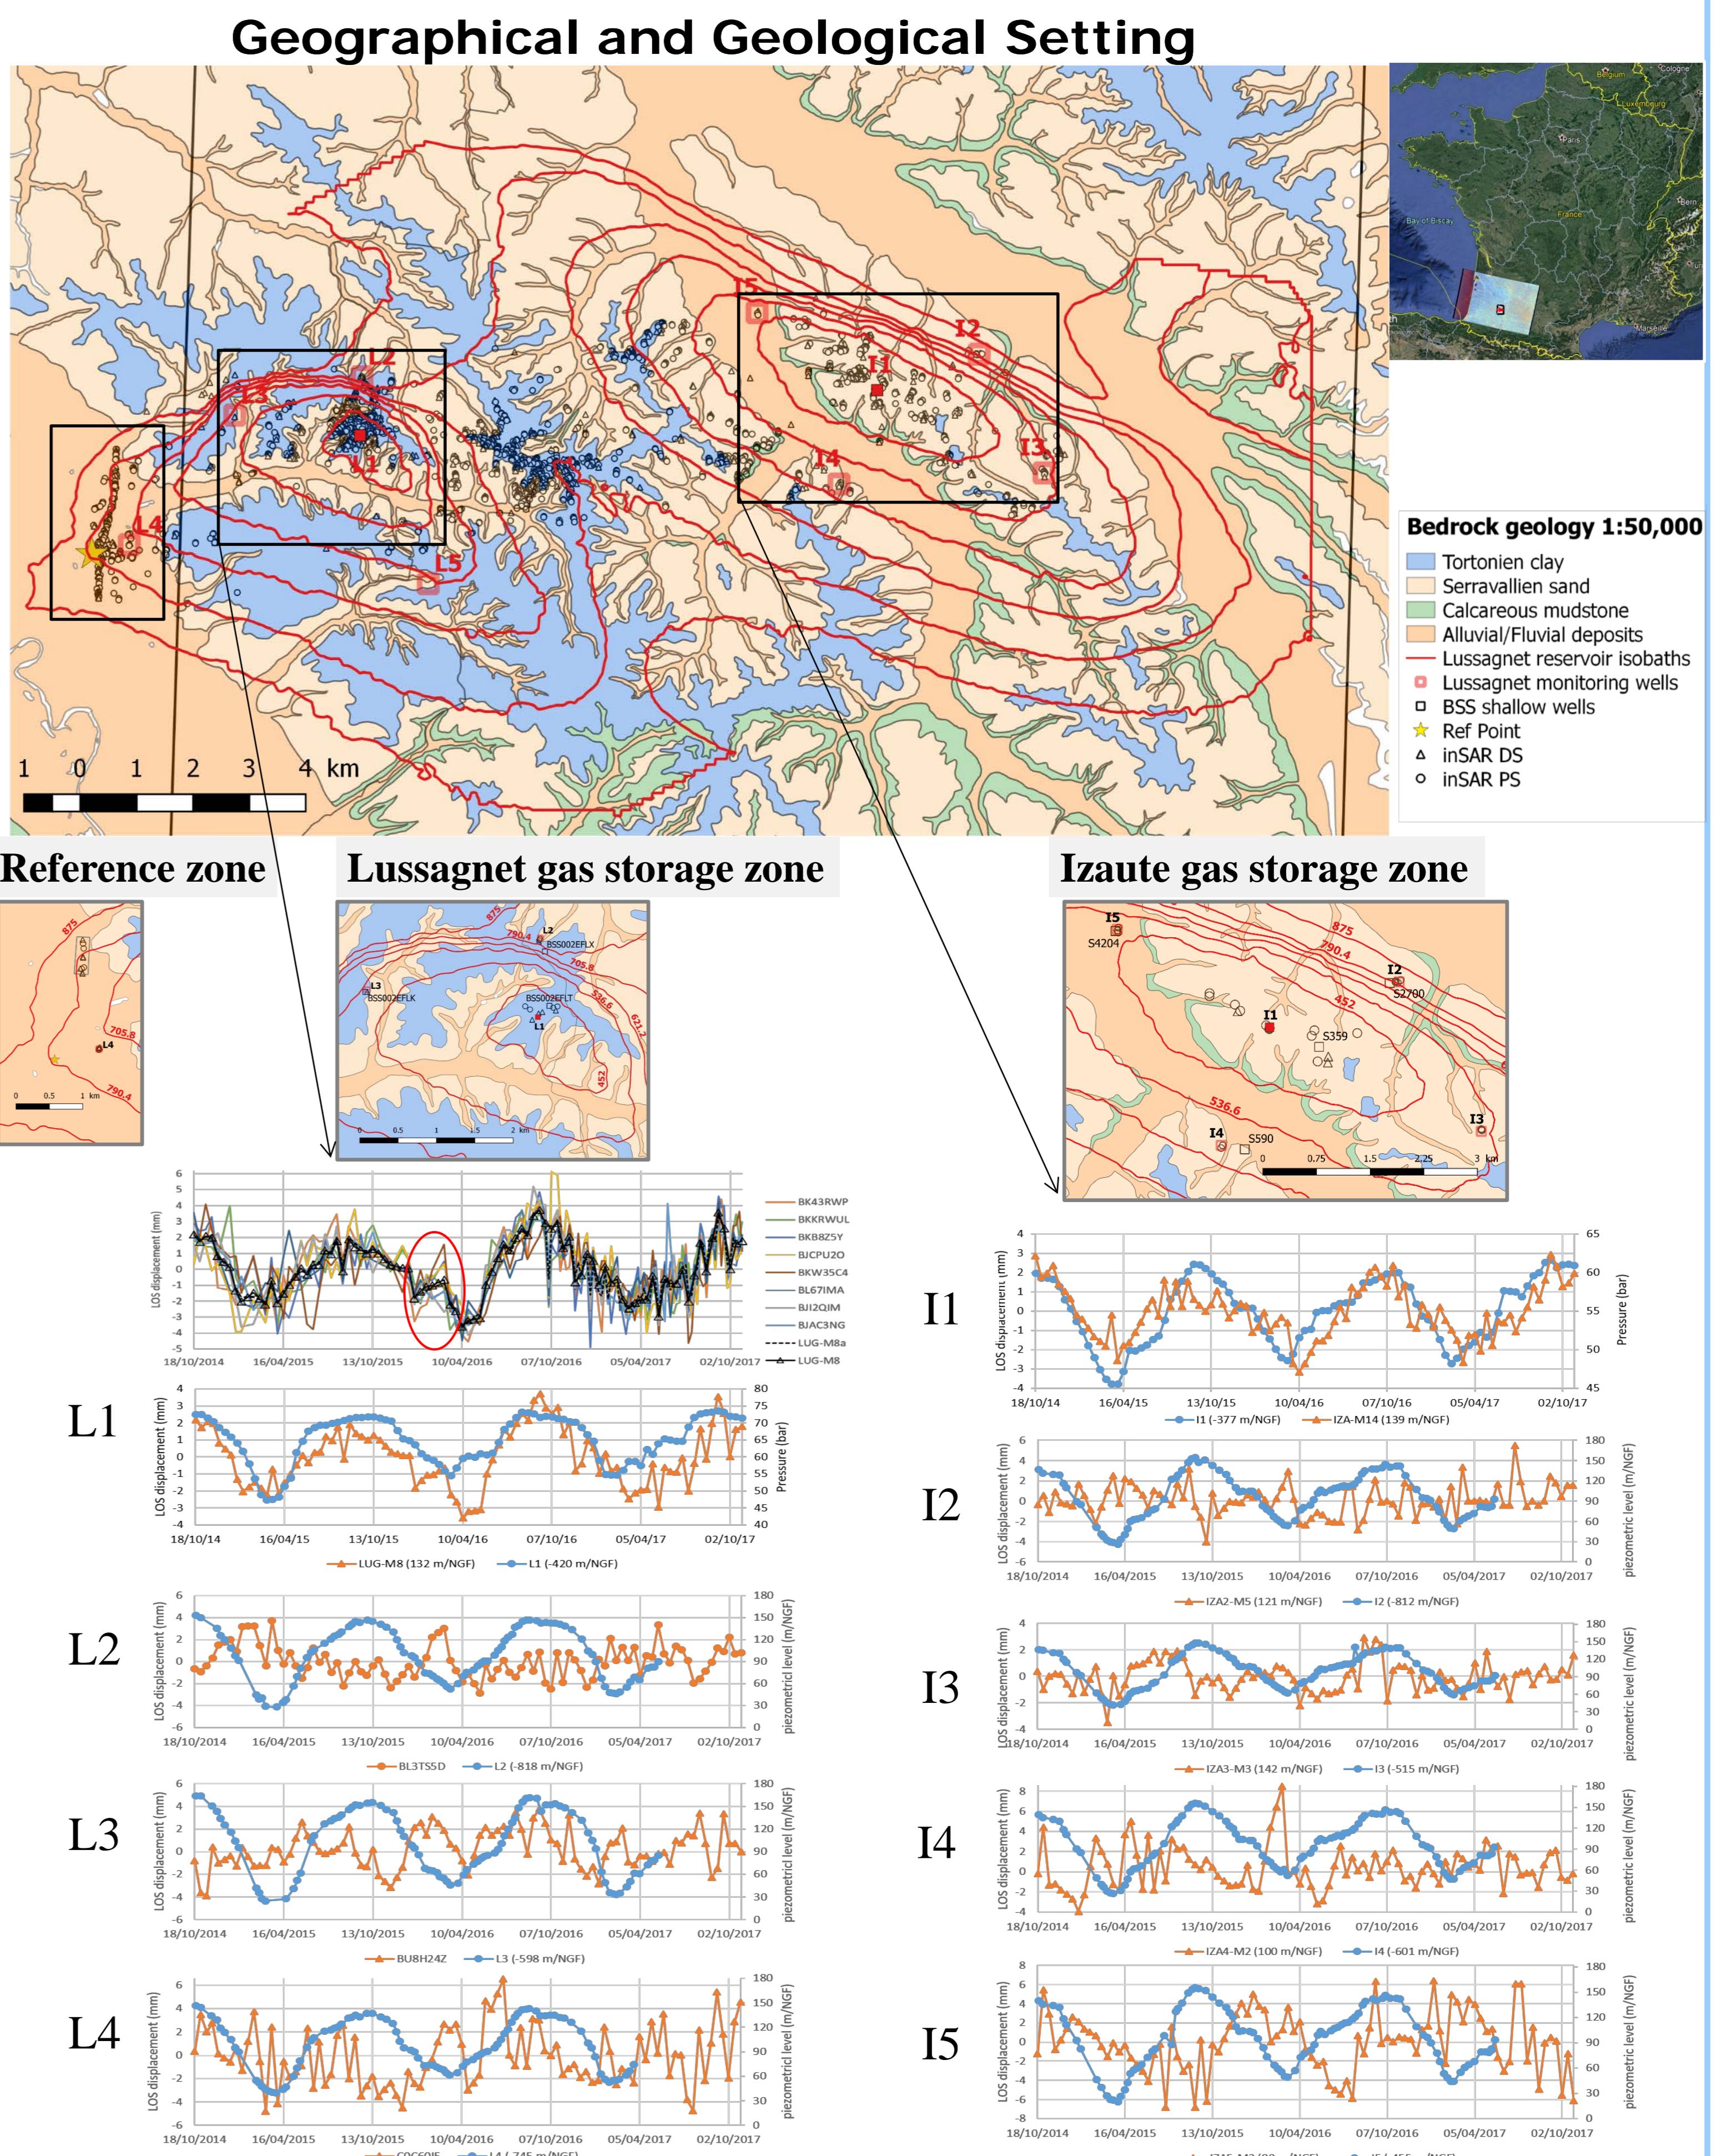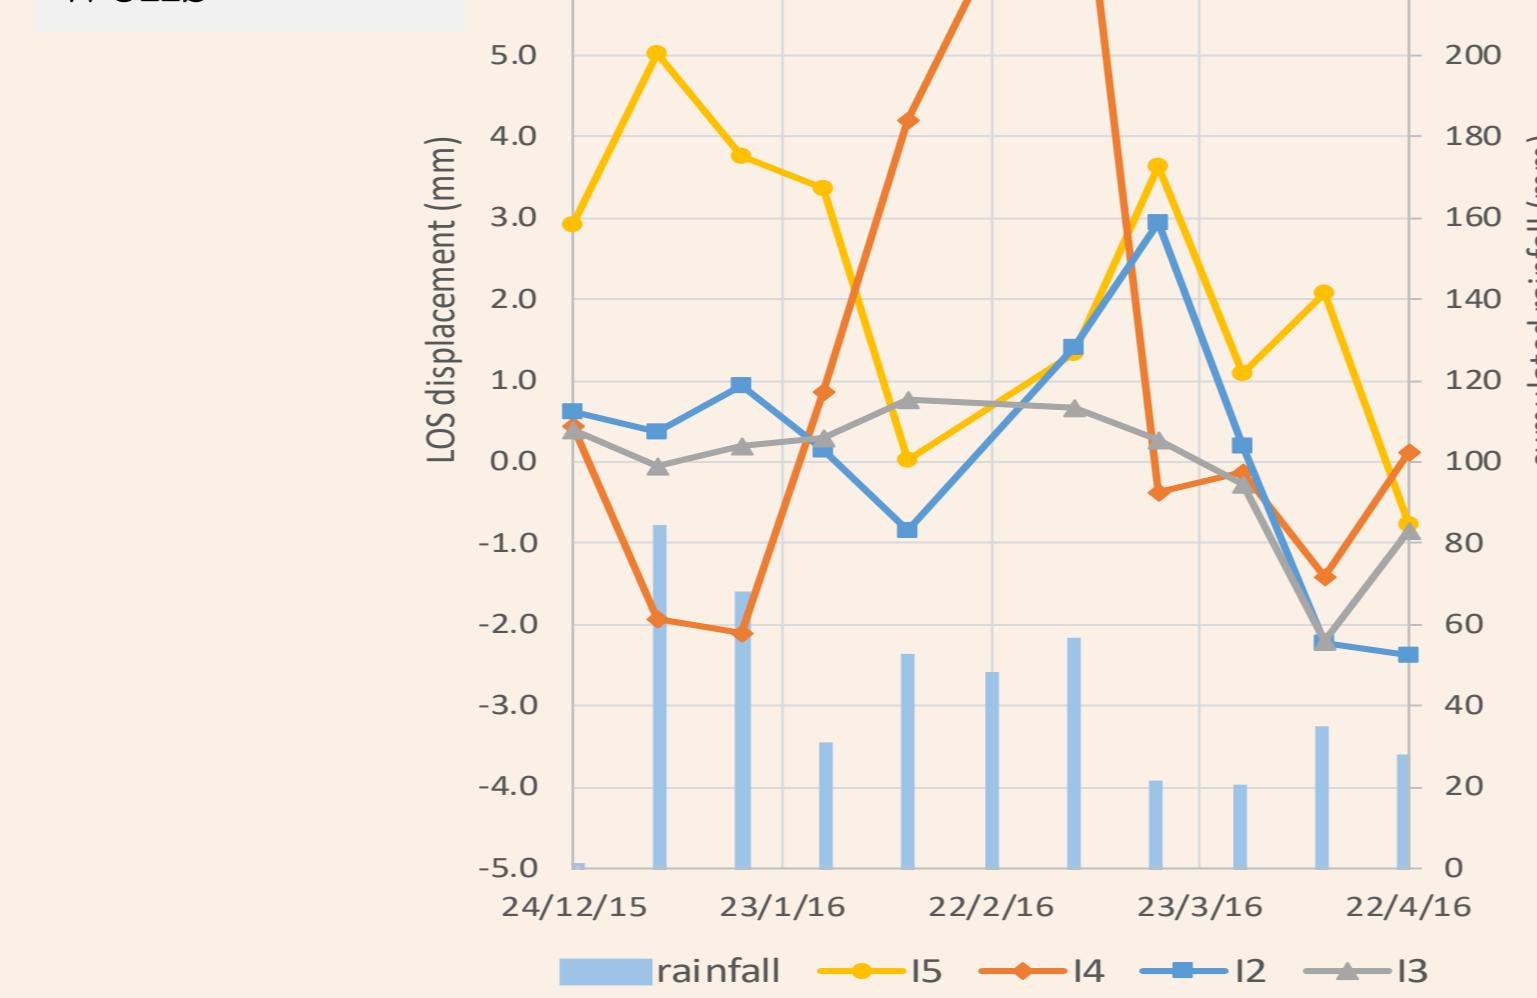


### Modeling of LOS displacement at Lussagnet site during the 4-month episode

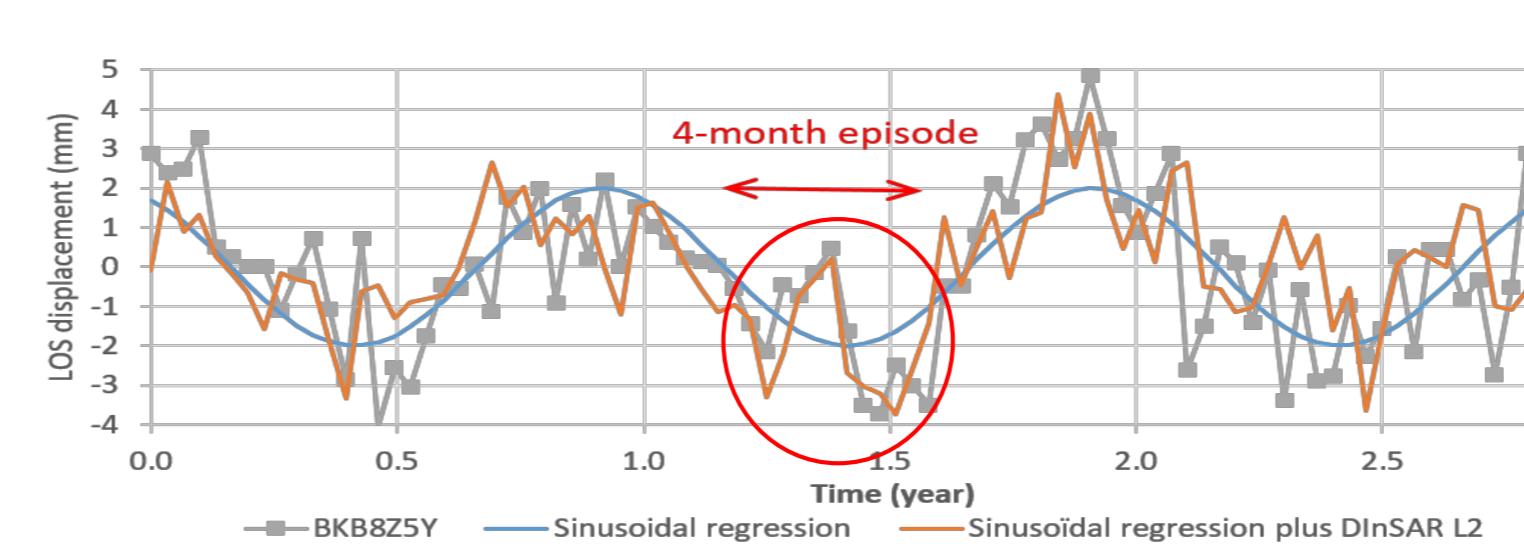

$$SR(t) = A_{max} \cos((t + \varphi) \times 2\pi/T) \quad (1)$$

$$M(t) = SR(t) + L2(t) \quad (2)$$

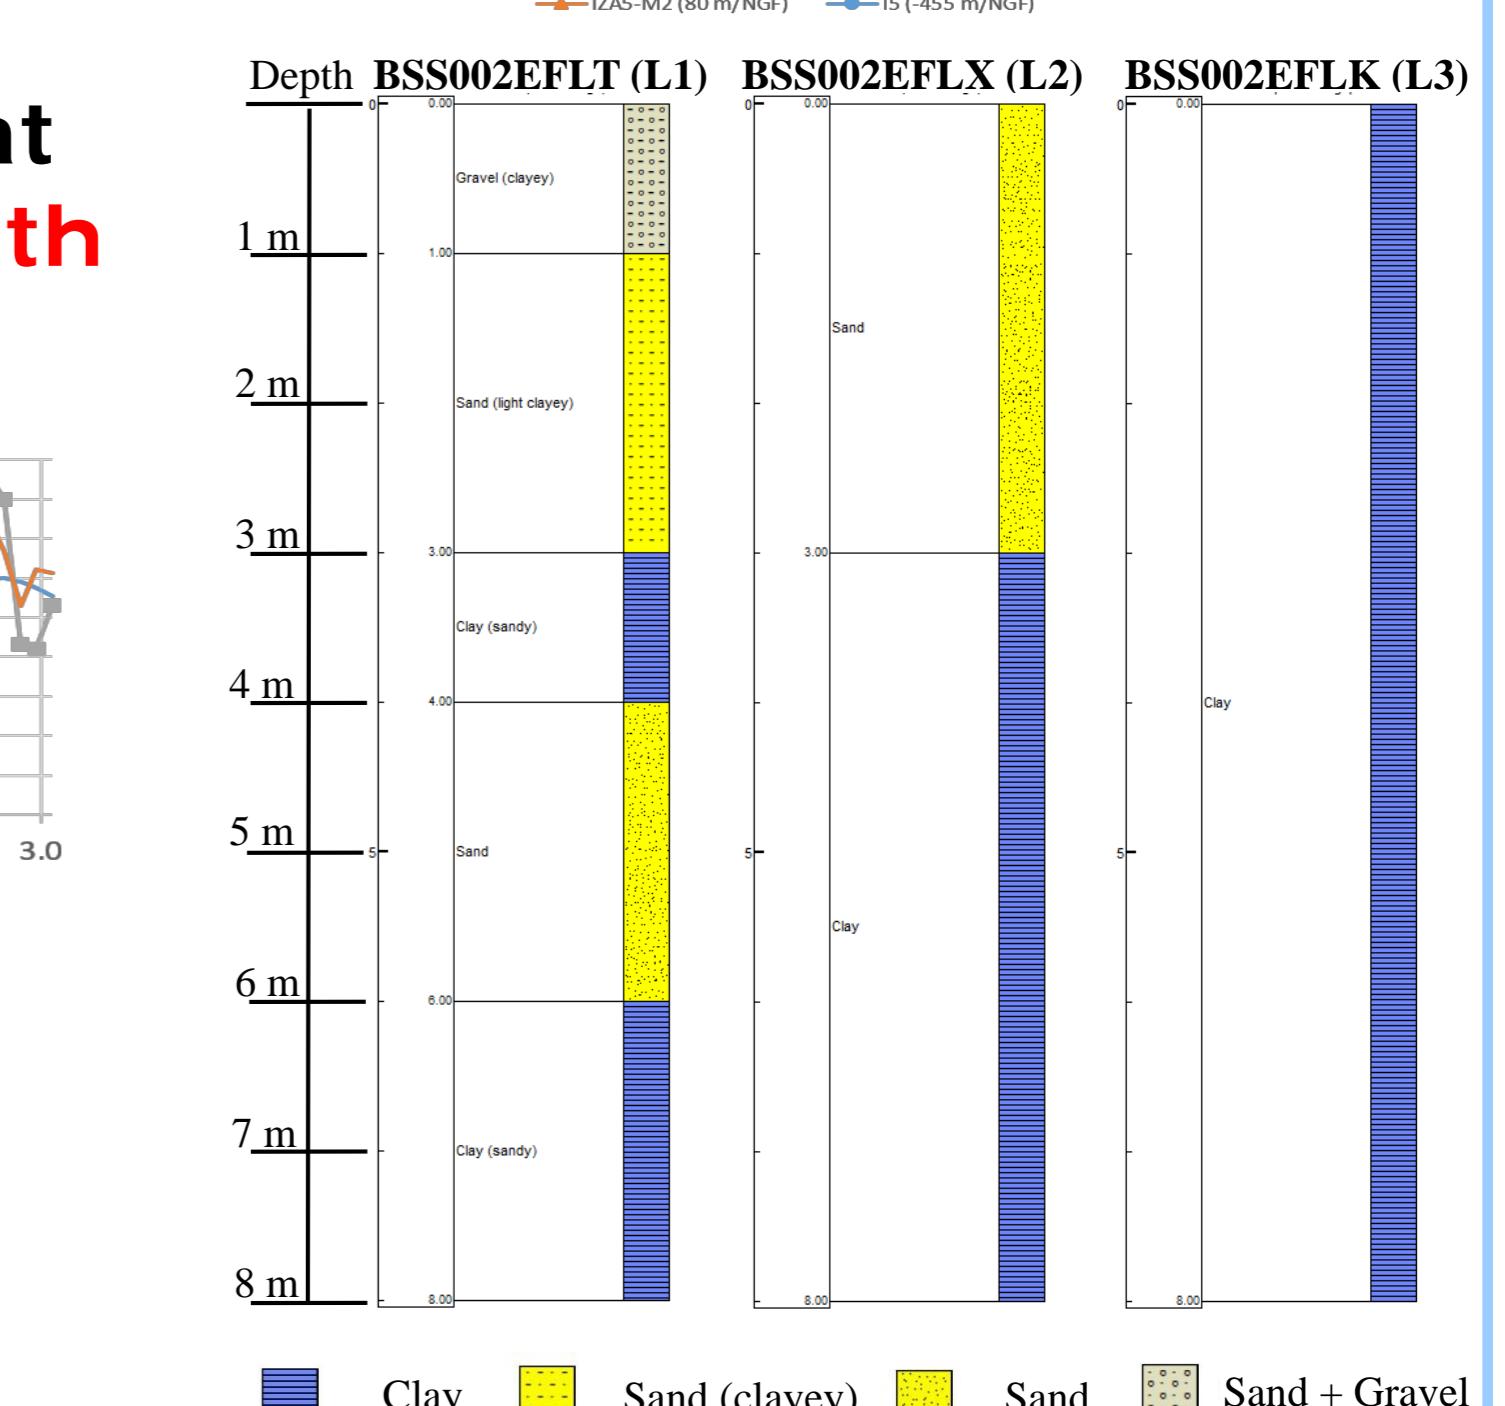

Geological Logs extracted from the BSS subsurface database (<http://infoterre.brgm.fr/>)

## Conclusions

- A vertical ground deformation between **4 and 8 mm** is detected by DInSAR during the summer and winter periods due to the gas exploitation at both gas storage sites (Lussagnet and Izaute).
- The wavelet-based analysis reveals a soil expansion in the Lussagnet zone that contrasts both in phase and period with the seasonal deformation and that is linked to the surface soil moisture measured by the SMOS satellite. This other displacement is consistent with the water infiltration in the unsaturated zone followed by **the swelling of a clay layer (as given by BSS subsurface database)**.
- This work reveals the combination of two different processes driving the ground displacement with the same order of magnitude (about 6 mm), namely **the pressure variation of a deep gas reservoir and the swelling/shrinking of the shallow subsurface**.

### Acknowledgments

ENTREPOSE-GEOSTOCK is the sponsor of the Web-RDS project funded by the program CITEPH <http://www.citeph.fr>