

# Advantages of online SPE coupled with UPLC/MS/MS for determining the fate of pesticides and pharmaceutical compounds

Anne Togola, Nicole Baran, Charlotte Coureau

# ▶ To cite this version:

Anne Togola, Nicole Baran, Charlotte Coureau. Advantages of online SPE coupled with UPLC/MS/MS for determining the fate of pesticides and pharmaceutical compounds. Analytical and Bioanalytical Chemistry, 2014, 406 (4), pp.1181-1191. 10.1007/s00216-013-7248-8. hal-00851485

# HAL Id: hal-00851485 https://brgm.hal.science/hal-00851485

Submitted on 14 Aug 2013

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

1	Advantages of on-line SPE coupled with UPLC/MS/MS
2	for determining the fate of pesticides and
3	pharmaceutical compounds
4	
5	Anne Togola, Nicole Baran, Charlotte Coureau
6	Bureau de recherches géologiques et minières (French Geological Survey), Laboratory
7	division, 3 avenue Claude Guillemin, 45060 Orléans Cedex 02, France.
8	
9	Corresponding Author
10	Anne Togola
11	Tel (+33)238643836
12	Fax (+33)238643925

a.togola@brgm.fr

## Abstract

14

15

16

17

18

19 20

21

22

23

2425

26

27

28

29

30

31

32

33

34

35

36

37

Laboratory experimentation is essential for our understanding of the fate and behaviour of pollutants. Many analytical techniques exist, but they all have disadvantages either in terms of sensitivity or of selectivity. The number of samples that can be analysed, the low volume of samples available during the experiment and the need to identify different degradates are all obstacles that new techniques are able to overcome. The work presented here summarizes progress in the field of metrology as concerns on-line solid phase extraction technology coupled with liquid chromatography followed by tandem mass spectrometry detection. Recently developed analytical techniques were validated for both 18 pesticides and their degradates and 17 pharmaceuticals and their degradates. Limits of quantification from 20 to 70 ng.L<sup>-1</sup> for pharmaceuticals and from 15 to 25 ng.L<sup>-1</sup> for pesticides and metabolites have been obtained, with linearity range up to 1 µg.L-1.The limits of quantification of a few ng per litre, the possibility of working on less than 1 mL of sample and the simultaneous quantification of the target products and their transformation products are all advantages that are demonstrated by two environmental applications. The first application concerns the evaluation of ecotoxicological effects of pesticides on aquatic organisms exposed in mesocosms. The second application aims to determine the adsorption constants of pharmaceutical molecules on soils and river sediments. For both applications, the robustness, range of linearity and limit of quantification of the developed analytical methods satisfy the requirements for laboratory experiments conducted under controlled conditions. Specific constraints generated by this type of experiment (adding CaCl<sub>2</sub> for the adsorption study and filtration of the water coming from the mesocosms) were not found to limit the use of on-line SPE. These 2 preliminary studies show that new experimental fields are possible thanks to on-line solid phase extraction coupled with liquid chromatography.

38

39

# **Keywords**

40 On-line-SPE, pesticides, pharmaceutical, experiment, monitoring

# 1 Introduction

Improved analytical techniques and stricter European regulations have led to an increased oversight of water in recent years. The presence in surface and groundwater of pesticides and emerging compounds has been confirmed [1-4]. This presence consequently raises several questions concerning both their toxicity for ecosystems and humans if the water resource is used as a source of drinking water, and the reasons for their presence in hydrosystems. Due to the vast number of compounds involved, the substances to be studied as a priority must be determined. Their ecotoxicological effect should be one of the criteria taken into consideration when they are ranked. At the same time, the fate of these substances must be studied and the risk of their transfer to surface- and groundwater must be assessed.

Many complex mechanisms that depend on the physicochemical properties of both the molecules and their host environment govern the fate of organic compounds in the environment. In soil, sorption and degradation processes not only govern the mobility of molecules toward groundwater, but also reduce the quantity of migrating molecules. By carrying out experiments under controlled laboratory conditions, the importance of these two processes and the key parameters affecting them can be studied.

For the adsorption of organic molecules, adsorption isotherms are therefore developed to determine the partition coefficient between the liquid and solid phases. The standard OECD (Organisation for Economic Co-operation and Development) protocol for pesticides has been the reference for many years [5] and also serves as a basis for the study of other organic substances. This guideline recommends using chromatographic techniques, which can be coupled with mass spectrometry, or liquid scintillation counting when radiolabelled substances are used. The use of <sup>14</sup>C-labelled molecules to determine adsorption isotherms is therefore fairly common. This method makes it possible to carry out precise, rapid and inexpensive analyses while working with relatively low concentrations. However, aside from the fact that this technique requires that the laboratory and personnel be certified for handling this type of products, there are few <sup>14</sup>C-labelled substances on the market vs. the number of potential organic contaminants. Custom synthesis of <sup>14</sup>C-radiolabelled compounds can be particularly expensive. Furthermore, the study of mixtures of molecules in order to determine whether they might compete with one another requires numerous experiments because several labelled molecules cannot be used simultaneously. These considerations might represent an obstacle. This is particularly crucial in environmental studies where not only the parent molecule, but also its metabolites and/or transformation products, are studied. In the same way, it is sometimes more relevant to test the behaviour of mixed rather than individual

substances either because a mixture of pesticides is registered or because several molecules are used together according to farming practices.

Unlabelled molecules can be used, but this can be more constraining because heavier extraction and analytical techniques must be employed. Moreover, the limits of quantification might be higher and require working with higher concentration ranges than with <sup>14</sup>C-labelled molecules. Last but not least, the analytical uncertainty is greater.

For toxicity, experiments that aim to determine the chronic and long-term toxic effects of compounds require working at low concentrations of mixtures of chemicals [6]. Numerous conditions must be taken into consideration, which multiplies the number of analyses that must be carried out and therefore the cost of assessments. Few ecotoxicological studies therefore use real exposure values. Most simply use theoretical values, which are, in some cases, distorted by molecular degradation and the appearance of degradation products [6]. Methods that are easy to carry out, robust and inexpensive are therefore needed in order to increase the relevance and the representativity of ecotoxicological studies.

Water samples can be analysed directly without sample pretreatment. Lin and Gan [7] injected supernatants after filtering them on Whatman 0.45-µm glass microfiber filters. Concentrations in the µg L<sup>-1</sup> range can be determined for some rather sensitive molecules using these analytical methods. Despite the increased sensitivity of spectrometric methods, it is sometimes necessary to lower this limit. For that, a pre-concentration step using cartridges (Solid Phase Extraction) is usually necessary.

Classical off-line SPE techniques are therefore used but require large quantities of samples and/or high concentrations, in some cases very different from environmental conditions, e.g. 500  $\mu$ g L<sup>-1</sup> [8]. Drillia et al. [9], studying the adsorption of 6 pharmaceutical molecules in 2 soils, used an off-line SPE system with 50 mL of solution and initial concentrations of between 1 and 12 mg L<sup>-1</sup>. Fenet et al. [10], studying the adsorption of carbamazepine and 2 of its metabolites on 2 soils, worked with concentrations ranging between 250 and 3,000  $\mu$ g L<sup>-1</sup>.

On-line SPE makes it possible to combine a first step that entails the loading of the sample into an extraction cartridge with a second step that couples cartridge elution and chromatographic separation, followed by detection, usually by mass spectrometry. There are various configurations for this application [11].

On-line SPE was first used to detect compounds in plasma or urine [12]. In the last decades, environmental applications have multiplied, both for monitoring compounds like organophosphorous compounds and their degradation products in rivers [13, 14] and for detecting broad ranges of chemicals in aquatic environments [15]. To our knowledge, however there are very few examples of on-line SPE coupled with liquid chromatography being used to determine the adsorption constants of organic molecules [16] and none as our knowledge to assess the ecotoxicological effects.

The aim of this study is therefore to determine to what extent the use of on-line SPE coupled with UPLC/MS-MS is suitable for environmental laboratory studies for polar organic molecules such as pesticides or emerging compounds. To do this, two environmental applications having different constraints and requirements in terms of results were considered. The first application is part of a pesticide ecotoxicity study and the second involves the assessment of the risk of leaching of pharmaceutical products by means of adsorption studies. For each application, the analytical method developed is first described and evaluated for its performance (accuracy, robustness), after which the results obtained are judged for their suitability regarding the requirements of the type of study involved.

# 2 Materials and Methods

# 2.1 Materials

Analytical standards (purity >98%) were supplied by Dr. Ehrenstorfer (VWR International, Fontenay sous Bois, France) and Sigma Aldrich (Saint Quentin Fallavier, France). HPLC-grade formic acid (98%), acetonitrile and water were supplied by Avantor Performance Materials (Deventer, Netherlands). Individual solutions containing 500 mg L<sup>-1</sup> of the target compounds were prepared in methanol and stored in the dark at -18 °C. Standard mixtures were prepared – one containing 10 mg L<sup>-1</sup> for each compound in methanol, and working solutions at 1 mg L<sup>-1</sup> and 10  $\mu$ g L<sup>-1</sup> in natural water for calibrations. For pesticide analyses, D<sub>6</sub>-mecoprop, D<sub>6</sub>-isoproturon and D<sub>10</sub>-simazine were used as surrogate standards – 30  $\mu$ L of a solution mix (containing 5 mg L<sup>-1</sup> of each compound) were added to each 1.5-mL water sample. For the analysis of pharmaceutical compounds, D<sub>5</sub>-oxazepam, D<sub>6</sub>-sulfamethoxime, D<sub>3</sub>-ibuprofen and D<sub>5</sub>-diazepam were used. A working solution was prepared containing 250  $\mu$ g L<sup>-1</sup> of each standard except for D<sub>3</sub>-ibuprofen (2,000  $\mu$ g L<sup>-1</sup>). One hundred microliters of the solution were added to each 1-mL water sample.

## 2.2 Instrumentation and analysis

The on-line SPE system consists of a standalone 515 pump hooked up to the ACQUITY UPLC system by a Rheodyne switching valve. The sample is injected with a 2777 autosampler equipped with a 2-mL syringe and loaded through the cartridge via the 515 pump, with a water flow rate of 2 mL min<sup>-1</sup>. During this loading step, the valve switches to "waste" at the cartridge outlet. During elution, the valve switches to direct the mobile phases through the cartridge, then the analytical column and the detection system. The 515 pump is off at this time (Figure 1). Analyses were done with a Waters Quattro Premier XE triple quadrupole mass spectrometer (Guyancourt, France). Waters also supplied the extraction cartridge (Oasis®HLB, 2.1 x 20 mm, 25  $\mu$ m) and the HSS T3 analytical column (2.1 × 150 mm, 1.7  $\mu$ m).

A sample volume of 500  $\mu$ L was injected. The water for sample loading was adjusted to pH 3.4 with acetic acid. The mobile phase was composed of Solvent A (0.05 % formic acid in water) and solvent B (0.05 % formic acid in acetonitrile) at a constant flow of 0.4 mL.min<sup>-1</sup>. The gradient was programmed to increase the amount of solvent B from an initial 0 % (maintained for 1 min) to 100 % in 7.5 min, stabilize at 100 % for 3 min, and return to the initial conditions (0 % B) in 0.3 min. These conditions were maintained for 5 min.

Mass spectrometry was done with a triple quadrupole fitted with an ESI interface and controlled by MassLynx software. Typical interface conditions were optimized for maximum intensity of the precursor ions as follows: cone gas and desolvation (drying gas) N₂ flows were set at 800 and 50 L.h⁻¹, respectively, and source block and desolvation temperatures were 150 and 400 °C, respectively. The ESI polarity ionisation mode was set individually for each target compound. Positive and negative polarity modes were used simultaneously during the same analytical run. Argon was used as the collision gas at a pressure of 3.7 10⁻³ mBar. MRM transitions were selected and tuned individually for each analyte. To optimize the mass spectrometer, a 500 μg.L⁻¹ standard solution of each analyte was infused directly. The specific and intense product ions of each target analyte were used for quantification, and a secondary product ion was used as a qualifier ion for confirmatory purposes. The optimal conditions for each pesticide and pharmaceutical product are summarized in tables 1 and 2.

Calibration curves were obtained by a weighted (1/x) linear least square regression. Calibration samples were treated like environmental samples. A standard curve was acquired at the beginning and at the end of each measurement series. The first measurement of standards was used for quantification and the second was used as quality control. Procedural blanks consisting of nanopure water and blank samples consisting of nanopure water with surrogate standards were used in every sequence in order to reveal any

analytical interference or possible carryover. Sensitivity and accuracy of the measurements are controlled after each twenty-samples series by injection of quality control samples at low level (limit of quantification) and intermediate level (100 ng/L).

# 2.3 Ecotoxicological study

The aim of this study was to assess and compare the structural and functional effects of current and alternative wheat crop protection programs on aquatic macro invertebrates using outdoor pond mesocosms. Four exposure scenarios were defined according to the type of crop protection program and the geographical location of treated fields. In order to determine the treatment-related effects on the structure of macro invertebrate communities and on litter breakdown, researchers must characterize the exposure of the test systems to the different substances. The experiment is described in detail in Auber et al. [17]. A list of the 18 compounds studied is given in table 1. The pesticides belong to various chemical classes (ureas, azole, sulfonylureas, hydroxybenzonitriles, etc.) having different chemical properties.

Over a period of 18 months, samples were collected 24 h after each treatment and every three weeks, regardless of the treatment, in order to obtain information on pesticide residue levels. More than 700 water samples were collected (250 mL) and frozen at -20 °C until extraction and analysis. One and a half millilitres of each sample was filtered (GFF, 0.45  $\mu$ m) and 30  $\mu$ L of the surrogate solution was added before analysis.

# 2.4 Adsorption experiments

## 2.4.1 Molecules and solids studied

For this specific study, three pharmaceutical molecules that are included in the list of 17 that can be analysed simultaneously with the method developed (Table 2) were tested – carbamazepine, sulfamethoxazole and oxazepam. They were chosen because they are frequently detected in the ground- and surface waters of the "Val d'Orléans" (the left bank of the Loire River between Guilly and the confluence of the Loiret River near Orleans, France) [18]. Indeed, from March 2008 until July 2010, carbamazepine, oxazepam and sulfamethoxazole were quantified, respectively, in 89, 93 and 68 % of samples coming from 2 rivers and one well taping groundwater, with maximum concentrations of 91, 120 and 68 ng L<sup>-1</sup> (n = 53 for each site). These molecules are among the most quantified of the 30 that are sought.

Three agricultural soils and two river sediments were collected in the hydrosystem. Their particle size distribution and physicochemical characteristics are given in table 3. All of the soils are predominantly sandy with water pH varying between 6.3 and 7.7. Soil D has the highest cation exchange capacity, although it is still relatively low for a soil (10.6 meg/100 g).

218

219

214

215

216

217

## 2.4.2 Adsorption isotherms

220 Experimental isotherms were determined using the batch equilibrium method (OECD test 221 guideline 106; OECD, 2000). The liquid to solid ratio used for the sorption study was 2 - 5 g 222 of soil or sediment (air dried and sieved to 2 mm) for 10 mL of solution. The temperature was set at 20 °C. Solutions of three molecules at concentrations of around 0.25, 0.64, 1.28, 6.35 223 and 25.5 µg L<sup>-1</sup> were prepared in CaCl<sub>2</sub> at 0.01 M. A solution containing only carbamazepine 224 225 was also prepared at similar concentrations. The experiments (mixture of molecules or 226 carbamazepine alone) were done in triplicate. The experimental isotherms were fitted using 227 the Freundlich equation:

$$228 C_s = K_f \times C_e^{nF} (1)$$

- where  $C_s$  is the adsorbed concentration (mg kg<sup>-1</sup>),  $C_e$  is the equilibrium concentration in the solution (mg L<sup>-1</sup>),  $K_f$  is the Freundlich coefficient (sorption constant in L kg<sup>-1</sup>) and nF (dimensionless) is the characteristic sorption coefficient. Sorption was then normalized with regard to the organic carbon fraction of the soil ( $f_{oc}$  in %) by calculating the coefficient  $K_{oc}$  (L kg<sup>-1</sup>) using the equation:
- $234 K_{OC} = \frac{K_f}{f_{OC}}$

235

236

237

238

239

240

241

242

243

# 3 RESULTS and DISCUSSION

# 3.1 Analytical aspects and method validation

#### 3.1.1 Analytical method

The chromatographic and spectrometric methods used were similar to classical ones. On the other hand, the on-line SPE step needed to be optimized [19]. The main criteria to be optimized were the loading time (here 1 min), the 515 pump flow rate and the nature of the loading water. Due to the differences in the physicochemical properties of the molecules studied, tests were run at pH 7, 3.4 and 2. Effects were evaluated in terms of signal enhancement. For neutral compounds, such as azoles and strobine, there was no significant

impact of the pH. A distinct improvement was achieved with pH 3.4 for ureas, sulfonylureas and hydroxybenzonitriles. The same assay was done for pharmaceuticals and pH 3.4 was also retained because of a positive effect on ibuprofen and naproxen metabolites without any negative effect on the other compounds. This improvement\_is also observed in off-line SPE for ionic molecules where samples are acidified prior to extraction [20]. Acidifying the loading water eliminates the need to acidify each individual sample prior to analysis as is done for off-line SPE extractions, which is much less constraining.

Concerning elution conditions, the only noteworthy modification to the classical methods was a shorter column rinsing time with 100 % acetonitrile (2 min vs. 5 min) in order to avoid crushing the cartridge and inter-sample contamination. This robustness was verified by injecting a blank after samples containing very high contents. To recondition the cartridge with water at pH 3.4, the 515 pump was restarted 3 min before the end of the analysis.

The use of on-line SPE requires that there be no suspended matter in the water samples. Samples from mesocosms where suspended matter appeared during the experiments were therefore filtered (0.45 µm polyacrylate syringe filter). Previous laboratory tests showed that the molecules under consideration did not adsorb on the filter. For analyses carried out to determine adsorption isotherms, the samples were centrifuged (2,500 rpm for 20 min) before surrogates were added and they were injected. The centrifuging is efficient enough to eliminate any suspended matter that might alter the chromatography system. Filtration was therefore not necessary.

# 3.1.2 Linearity and Limits of Quantification

- Quantification was carried out by plotting the peak area of an analyte and its respective internal standard against the corresponding analyte–internal standard concentration ratio. The limit of quantification (calculated from calibration standard, with a signal to noise ratio above 10:1) for 500  $\mu$ L of injected sample is 20 ng L<sup>-1</sup> for all of the pharmaceutical substances except naproxen, o-desmethyl naproxen, diclofenac and ibuprofen, for which the limit is 70 ng L<sup>-1</sup>.
- For the study of pesticide compounds, the limits of quantification (calculated from calibration standard, with a signal to noise ratio above 10:1) for 500 µL of injected sample are between 15 and 25 ng L<sup>-1</sup>, with the higher values being for hydroxybenzonitriles (bromoxynil and ioxynil). The simultaneous analysis of molecules that have different physicochemical properties entails compromises that affect these two molecules in particular.

Due to the preliminary on-line extraction step, the linearity ranges of these methods (Tables 1 and 2) are narrower than those of methods involving classical injections. The samples must therefore be diluted. Since the entire procedure is meant to be rapid (< 20 min), in the cases presented here, for which the measured concentrations were predictable, the dilution factors were estimated and diluted samples were injected simultaneously with the raw samples.

#### 3.1.3 Robustness

One of the main advantages of this technique is its robustness to the aging of cartridge and matrix variability. This was evaluated based on the response (in terms of peak area) of the internal standards added to each sample. Within a given analytical series (75 to 100 samples), variability is 10 % and 11.5 % for simazine d10 and isoproturon d6, respectively. For several analytical series spread over 1 year (which corresponds to about 700 samples and more than 3,000 injections), this variability is between 15 % and 19 %, which is similar to the variability measured with off-line SPE and LC/MS/MS analyses [20]. The slight variations of the concentrations of major ions in the matrix (mesocosm water) can contribute to this method reliability, together with the fact that the calibration is done in the matrix. The use of extraction tracers also makes it possible to increase the robustness of the method. Combined to quality control samples, the gravimetric adding of tracer mix guarantees the correct quantification of compounds.

Use of multiple tracers allows to enhance the range of compounds that can be measured by online SP combined to LC/MS. Huntscha et al. [15] developed a self-made mixed-bed multilayer extraction cartridge in order to increase the range of molecules that can be extracted with this technique. Combining this with the use of 50 isotope-labelled compounds as an internal standard mixture, they obtained extraction yields of between 80 and 110 %.

## 3.1.4 Effect of the composition of the matrix

According to OECD guidelines [5], laboratory experiments require the use of CaCl<sub>2</sub>. The effect of adding calcium chloride was determined by comparing the slopes of two calibrations – one done in spring water and the other in CaCl<sub>2</sub> 0.01 M. The ratio between the two slopes is between 85 and 110 %, depending on the compound, which shows that CaCl<sub>2</sub> has little effect on analytical performance. The chromatographic peak resolution is not affected by this modification (Figure 2). The calibration ranges associated with these experiments have therefore been determined in CaCl<sub>2</sub> 0.01 M.

# 3.2 Results of monitoring ecotoxicological experiments

- 313 Eighteen pesticides and degradates were monitored during the experiments. As an example,
- 314 figure 3 shows isoproturon dissipation and the formation of its degradates.
- 315 In our study, monitoring pesticide compound concentrations with a short time step revealed
- the fleeting appearance of degradation products, including those of isoproturon (Fig. 2). The
- 317 replicates shown correspond to experimental replicates (3 mesocosms for each exposure
- 318 scenario).

312

- 319 The detection of the onset, even for a relatively short period of a few weeks, of
- 320 monodesmethyl-isoproturon is particularly interesting. Indeed, this substance is recognized
- 321 as a major metabolite of isoproturon. Isoproturon's two metabolites are rarely quantified in
- water. Despite the very lengthy monitoring of a spring that is the outlet of a karstic system
- 323 (476 samples collected between 1998 and 2006), rapid water circulation and exchanges
- 324 between surface- and groundwater, monodesmethyl-isoproturon was detected only twice.
- 325 Didesmethyl-isoproturon has never been detected [21]. In addition, European regulations
- 326 recommended that particular attention should be paid to the protection of aquatic organisms
- 327 [223].
- 328 Average Exposure Concentrations (AEC) were calculated for each compound and each
- 329 scenario (Table 4) and could be correlated with effects on populations of exposed organisms
- 330 [17]. The identification of new compounds resulting from the degradation of parent
- compounds is important (e.g. mono-desmethyl-isoproturon) as these can, in some cases,
- 332 explain unexpected ecotoxicological effects.

333

# 3.3 Adsorption isotherms of pharmaceutical products

335336

- For all three of the molecules studied simultaneously, adsorption isotherms (Figure 4) show
- that the order of decreasing adsorption is the same and depends on the material: soil D > soil
- 338 C > soil B ~ sediment B > sediment C.
- 339 Likewise, for a given soil, the adsorption constant decreases as follows: Oxazepam >
- Carbamazepine (> Sulfamethoxazole). For sulfamethoxazole, the results are unsatisfactory
- 341 since the behaviour of the substance seems to be concentration-dependant (higher
- 342 adsorption than the 2 others molecules for low concentrations and lower adsorption for high
- concentrations). A reliable estimation of the adsorption constant cannot be proposed here.
- Lin and Gan [7] showed, on 2 soils, that sulfamethoxazole adsorption is limited and even

considered to be negligible (concentrations in the supernatant similar to initial concentrations). As the analysis of the substance is not difficult, the inconsistencies can, a priori, be attributed to the intrinsic properties of the substance. Additional tests are needed in order to describe the fate of sulfamethoxazole. Although adsorption data are available for carbamazepine, there is little data available for the two other substances. For our soils, the average  $K_{oc}$  values are 425 +/- 58 and 1098 +/- 141 L kg<sup>-1</sup> for carbamazepine and oxazepam, respectively, when considered as a mixture. The carbamazepine adsorption constant is 471 +/- 119 L kg<sup>-1</sup> when the molecule was studied alone.

Drillia et al. [9], working with a soil that had an organic carbon content of 0.31 %, reported  $K_{oc}$  values of 132 +/- 2.7 kg  $L^{-1}$  for carbamazepine and 62.2 +/- 21.6 kg  $L^{-1}$  for sulfamethoxazole. Fenet et al. [10] determined carbamazepine adsorption constants of 158 and 309 kg  $L^{-1}$ , respectively, for a European "reference" soil and an agricultural soil receiving waste water effluents. Carbamazepine  $K_{foc}$  values of between 136 and 187 for 3 agricultural soils have been reported [22]. Working on a river sediment, Löffler et al. [23] demonstrated a higher adsorption of oxazepam than carbamazepine, in agreement with our results on both sediments.

The agreement of our experimental data with literature data obtained using other protocols (<sup>14</sup>C molecules, off-line SPE) validates the use of on-line SPE for this type of data acquisition. For soils, the very low variability observed for the triplicates (for the mixture or for carbamazepine alone) further validates this method. The greater variability observed for sediments is not attributed to the analytical method but might be related to the heterogeneity of the material.

## 4 Conclusions

This work describes 2 fully-automated methods based on on-line SPE/LC/MS/MS to determine concentrations of pharmaceuticals and pesticides in the constraining context of experimental studies. Their robustness and sensitivity are adequate considering the requirements of these applications. The similarity of off- and on-line approaches makes the transfer of methodologies between the two techniques easier and opens up the field to many other method transpositions. The major role of surrogates is one of the key factors behind the effectiveness of this approach and must not be overlooked. A compromise must be found between increasing analytical performance and limiting costs, all the while considering availability issues.

The results of our preliminary applications on pesticides and pharmaceuticals and the agreement of our experimental data with those of other studies validate the use of on-line SPE for the acquisition of experimental data.

For ecotoxicological studies, monitoring enables the correlation of observed biological effects and the measured occurrence of pollutants. This approach makes it possible to determine the fate of pollutants in mesocosms, including their dissipation, bioavailability and the appearance of degradates, by accurately measuring their concentrations in systems.

Given the range of concentrations that these techniques can handle (several nanograms per litre), adsorption experiments can be carried out at concentrations much lower than those reported in the literature. The use of higher concentrations with on-line SPE would require numerous dilutions and therefore greatly increase preparation time and increase uncertainties in measurements, thus making this method less advantageous. Although the use of lower concentrations might make it more difficult to compare results with those of other studies, it enables us to work at levels that are environmentally more realistic.

The automation of the system makes it possible to treat more samples. While some time is saved on sample preparation, even more is saved by the automatic sequencing of extraction/analysis and result reprocessing. This enables us to foresee numerous future environmental applications using this approach.

Concerning the range of molecules that can be analysed with this technique, the main limitation is the small number of phases available for the on-line extraction step. This means that multi-residue extractions result, in some cases, in very low yields, partially resolved by the use of isotope-labelled compounds as internal standard, but with an important increase of the analytical cost and dependant of the availability of those standards.

For the cartridge elution system using mobile-phase solvents, it is necessary to use solvents that are compatible with the analytical column and the detector, which limits the solvent mixtures that can be used. Eluents well-suited for the elution of ionic exchange cartridges cannot therefore be used with this type of analytical set-up (sodium or ammonium hydroxide, strong acid, etc.).

A wide range of molecules can however be analysed using this methodology, including both pesticide compounds and new compounds like pharmaceuticals, hormones, polar endocrine disrupting chemicals, etc. The growing need for experimental data – both for ecotoxicological

studies and for studies of the fate and behaviour of emerging compounds – might be more easily satisfied with this methodology.

411

412

413

417

# **Acknowledgments:**

- 414 This work was partly funded by the Scientific Division of BRGM. The results for pesticides
- 415 were obtained during the EMERITAT project, funded by the French Ministry of Ecology,
- 416 Energy, Sustainable Development and the Sea through its "Pesticides" research program.

## References

- Lapworth DJ, Baran N, Stuart ME, Ward RS (2012) Emerging organic contaminants in groundwater: A review of sources, fate and occurrence. Environ Pollut 163, 287-303
- Farre M, Perez S, Kantiani L, Barcelo D (2008): Fate and toxicity of emerging pollutants, their metabolites and transformation products in the aquatic environment. Trends Anal Chem 27, 991-1007
- 423 3. Loos R, Locoro G, Comero S, Contini S, Schwesig D, Werres F, Balsaa P, Gans O, Weiss S, Blaha 424 L, Bolchi M, Gawlik BM (2010): Pan-European survey on the occurrence of selected polar 425 organic persistent pollutants in ground water. Water Res 44, 4115-4126
- 426 4. Houtman CJ (2010): Emerging contaminants in surface waters and their relevance for the production of drinking water in Europe. J Integr Environ Sci 7, 271-295
- Organisation for Economic Co-operation and Development (2000): Guideline for the testing
   of chemicals, Section 1: Physical-Chemical properties Test No. 106: Adsorption -Desorption
   Using a Batch Equilibrium Method, pp. 44
- 431 6. Forbes VE, Forbes TL (1994). Ecotoxicology in Theory and Practice. Chapman and Hall Ltd., 432 London
- 433 7. Lin K, Gan J (2011): Sorption and degradation of wastewater-associated non-steroidal antiinflammatory drugs and antibiotics in soils. Chemosphere 83, 240-246
- 435 8. Murillo-Torres R, Duran-Alvarez JC, Prado B, Jimenez-Cisneros BE (2012): Sorption and mobility of two micropollutants in three agricultural soils: A comparative analysis of their behavior in batch and column experiments. Geoderma 189, 462-468
- 9. Drillia P, Stamatelatou K, Lyberatos G (2005): Fate and mobility of pharmaceuticals in solid matrices. Chemosphere 60, 1034-1044
- 440 10. Fenet H, Mathieu O, Mahjoub O, Li Z, Hillaire-Buys D, Casellas C, Gomez E (2012):
  441 Carbamazepine, carbamazepine epoxide and dihydroxycarbamazepine sorption to soil and
  442 occurrence in a wastewater reuse site in Tunisia. Chemosphere 88, 49-54
- 443 11. Mallet CR, Mazzeo JR, Neue U (2001): Evaluation of several solid phase extraction liquid 444 chromatography/tandem mass spectrometry on-line configurations for high-throughput 445 analysis of acidic and basic drugs in rat plasma. Rapid Commun Mass Spectrom 15, 1075-446 1083
- 447 12. Moser C, Zoderer D, Luef G, Rauchenzauner M, Wildt L, Griesmacher A, Seger C (2012): Simultaneous online SPE-LC-MS/MS quantification of six widely used synthetic progestins in human plasma. Anal Bioanal Chem 403, 961-972
- 450 13. Céspedes R, Skryjová K, Raková M, Zeravik J, Fránek M, Lacorte S, Barceló D (2006): 451 Validation of an enzyme-linked immunosorbent assay (ELISA) for the determination of 4-

- 452 nonylphenol and octylphenol in surface water samples by LC-ESI-MS. A collection of Papers
  453 Presented at the 1st Workshop of the European Union: Analysis and Removal of
  454 Contaminants from Wastewaters for the Implementation of the Water Framework Directive 455 1st EMCO 2005 70, 745-751
- 456 14. Lacorte S, Barcelo D (1995): Détermination of organophosphorus pesticides and their transformation products in river waters by automated online solid phase extraction followed by thermospray liquid chromatography mass spectrometry J. Chromatogr A 712, 103-112
- Huntscha S, Singer HP, McArdell CS, Frank CE, Hollender J (2012): Multiresidue analysis of 88 polar organic micropollutants in ground, surface and wastewater using online mixed-bed multilayer solid-phase extraction coupled to high performance liquid chromatography-tandem mass spectrometry. J. Chromatogr A 1268, 74-83
- 463 16. Enevoldsen R, Juhler RK (2010): Perfluorinated compounds (PFCs) in groundwater and aqueous soil extracts: using inline SPE-LC-MS/MS for screening and sorption characterisation of perfluorooctane sulphonate and related compounds. Anal Bioanal Chem 398, 1161-1172
- 466 17. Auber A, Roucaute M, Togola A, Caquet T (2011): Structural and functional effects of conventional and low pesticide input crop-protection programs on benthic macroinvertebrate communities in outdoor pond mesocosms. Ecotoxicology 20, 2042-2055
- Joigneaux E 2011: Etat qualitatif des eaux de la nappe du val d'Orléans : impact du changement climatique et gestion durable de la ressource,PhD thesis, Université d'Orléans, BRGM, France.
- 472 19. Berho C, Togola A, Coureau C, Ghestem JP, Amalric L (2013): Applicability of polar organic compound integrative samplers for monitoring pesticides in groundwater. Environ Sci Pollut 474 Res Int, doi: 10.1007/s1135601315081
- 475 20. Gervais G, Brosillon S, Laplanche A, Helen C (2008): Ultra-pressure liquid chromatography-476 electrospray tandem mass spectrometry for multiresidue determination of pesticides in 477 water. J Chromatogr A 1202, 163-172
- 478 21. Baran N, Lepiller M, Mouvet C (2008): Agricultural diffuse pollution in a chalk aquifer (Trois Fontaines, France): influence of pesticide properties and hydrodynamic constraints. J Hydrol, pp. 56-69
- Environment commission (2002): Review report for the active substance isoproturon Finalised in the Standing Committee on Plant Health at its meeting on 7 December 2001 in view of the inclusion of isoproturon in Annex I of Directive 91/414/EEC.
- 484 23. Calisto V, Esteves VI (2012): Adsorption of the antiepileptic carbamazepine onto agricultural soils. J Environ Monit 14, 1597-1603
- 486 24. Löffler D, Rombke J, Meller M, Ternes TA (2005): Environmental Fate of Pharmaceuticals in Water/Sediment Systems. Environ Sci Technol 39, 5209-5218

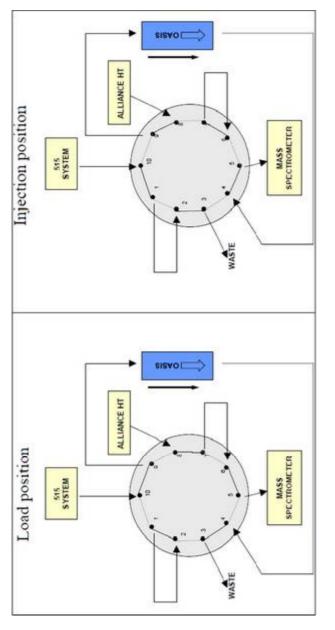


Figure 1: online SPE/UPLC/MS/MS set-up

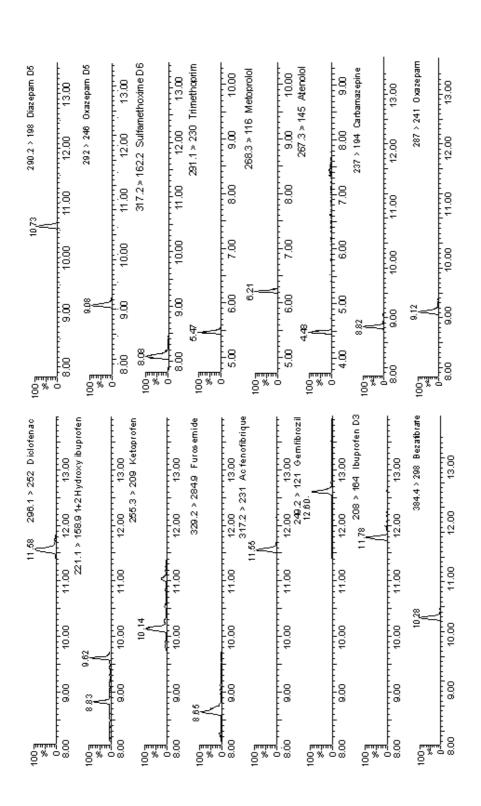


Figure 2:

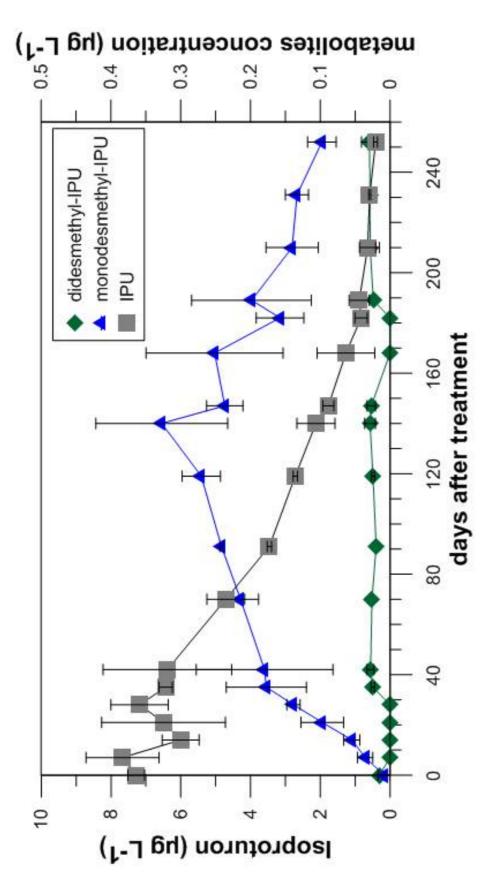


Figure 3: Monitoring of isoproturon and two degradates, concentrations in mesocosms. Results of the 3 replicates of the same scenario are shown

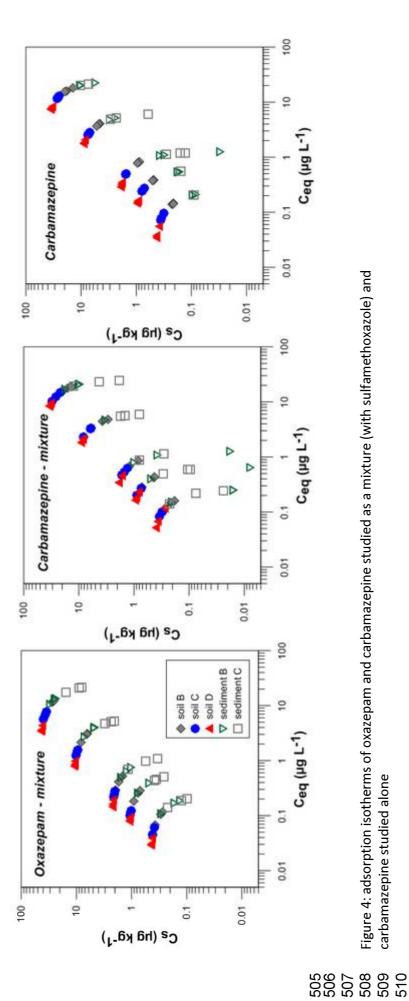


Figure 4: adsorption isotherms of oxazepam and carbamazepine studied as a mixture (with sulfamethoxazole) and carbamazepine studied alone

						Quantifier	ifier					Qualifier	ifier			
	chemical group	linear range ng.L- <sup>1</sup>	retention time (min)	lonization	Tran	Transition		cone Voltage	Collision Energy	lonization	Trans	Transition		cone Voltage	Collision Energy	Internal
Simazine D10 (SIM d10)	surrogate	250	4,08	ESI +	212,0	٨	137,0	35	20	ESI +	212,0	^	104,9	32	25	
Isoproturon D6 (IPU d6)	surrogate	250	4,47	ESI +	213,1	٨	6,77	30	18	ESI +	213,1	٨	171,0	30	15	
Isoproturon-didesmethyl	degradate	15-500	4,11	ESI +	179,1	٨	137,0	30	12	ESI +	1,6/1	٨	93,9	30	20	IPU d6
Metsulfuron methyl	sulfonyl urea	15-500	4,17	ESI +	382,0	٨	167,0	25	15	ESI-	379,9	٨	139,0	25	16	IPU d6
soproturon-monodesmethyl	degradate	15-500	4,30	ESI +	193,1	٨	6,56	25	20	ESI +	193,1	٨	151,1	25	12	IPU d6
Mesosulfuron methyl	sulfonyl urea	15-500	4,37	ESI+	504,1	٨	182,0	35	20	ESI-	502,1	٨	347,0	99	15	IPU d6
lodosulfuron methyl	sulfonyl urea	15-500	4,41	ESI +	8,703	٨	167,0	30	18	ESI-	506,2	٨	139,0	99	22	IPU d6
Isoproturon	urea	15-500	4,48	ESI +	207,0	۸	6,17	30	15	ESI +	207,0	٨	164,8	30	15	IPU d6
Bromoxynil	hydroxybenzonitriles	25-500	4,52	ESI-	275,8	٨	0,67	40	25	ESI-	273,8	٨	0'62	4	25	IPU d6
loxynil	hydroxybenzonitriles	25-500	4,81	ESI-	369,7	٨	127,0	40	30	ESI-	369,7	٨	215,0	4	25	IPU d6
Prochloraz	Azole	15-500	4,95	ESI +	378,0	٨	6'60£	20	10	ESI +	376,0	٨	307,8	20	10	SIM d10
Cyprodinil	Pyrimidine	15-500	4,97	ESI +	226,1	٨	92,8	30	35	ESI +	226,1	٨	108,0	30	25	SIM d10
Azoxystrobin	Strobin	15-500	4,98	ESI +	403,9	٨	372,0	30	15	ESI +	403,9	٨	329,1	30	30	SIM d10
Epoxiconazole	azole	15-500	5,01	ESI +	329,9	٨	120,8	33	18	ESI +	329,9	٨	140,8	33	18	SIM d10
Boscalid	Anilide	15-500	2,07	ESI +	342,9	٨	307,0	30	19	ESI +	342,9	٨	271,5	30	32	SIM d10
Flusilazole	azole	15-500	5,15	ESI +	316,1	٨	165,0	35	25	ESI +	316,1	^	247,2	35	15	SIM d10
Tebuconazole	azole	15-500	5,16	ESI +	9,708	٨	0,07	33	27	ESI +	307,9	٨	124,7	33	31	SIM d10
Napropamide	amide	15-500	5,19	ESI +	271,8	٨	1,171	56	18	ESI +	271,8	٨	198,9	26	13	SIM d10
Metconazole	azole	15-500	2,38	ESI +	320,0	٨	6'69	37	20	ESI +	320,0	٨	124,8	37	40	SIM d10
Prosulfocarb	thiocarbamate	15-500	26'9	ESI +	251,8	۸	2,06	25	20	ESI +	251,8	٨	128,0	25	12	SIM d10
511 512 Table 1 : Targ	Table 1 : Target pesticides and their optimized MS/MS paral	their optir	nized MS/I		neters											

Table 1: Target pesticides and their optimized MS/MS parameters

	Internal standards					BU d3	OXZ d5	DZP d5	DZP d5	IBU d3	DZP d5	DZP d5	OXZ d5	DZP d5	IBU d3	IBU d3	OXZ d5	OXZ d5	OXZ d5	SFX d6	SFX d6	SFX d6
		0	2		0		16 C			_	12						14 C	23 C	18 0	17 8	33 8	24 8
	Collision Energy	20	22		30		1	15	10		+	20	17	12	12							
	cone Voltage	30	35		35		30	25	25		30	35	32	25	25		30	30	35	30	25	42
Qualifier	ition	214,0	155.8	٨	198,0		233.0	169.9	127.1		209.0	204.8	298.0	252,0	158.9		269,0	145,0	116,0	155.8	179,0	230,0
	Transition	۸	٨		٨	I	٨	۸	٨		۸	٨	۸	٨	۸		^	^	۸	۸	۸	٨
	·	292,0	317.2		290.2		319,0	228.9	249.2		255.3	329.2	384.4	296.1	221.1		287,0	267.3	268.3	253.9	237,0	291.1
	lonization	ESI +	ESI +		ESI +	ESI +	ESI +	ESI -	ESI-	ESI +	ESI +	ESI-	ESI +	ESI-	ESI-	ESI +	ESI +	ESI +	ESI +	ESI +	ESI +	ESI +
	Collision Energy	20	22	7	22	12	10	7	13	7	8	15	17	12	2	8	20	18	18	26	18	24
	cone Voltage	30	35	25	35	25	25	25	25	25	25	35	30	25	25	25	30	30	35	30	25	42
Quantifier	ion	246,0	162.2	164.0	262.1	170.9	231,0	184.8	121,0	160.9	209,0	284.9	274,0	250,0	176.9	176.9	241,0	190,0	190.9	8.16	194,0	122.9
Qui	Transition	٨	٨	٨	٨	٨	٨	٨	٨	٨	٨	٨	٨	٨	۸	۸	٨	٨	٨	٨	٨	٨
	Tra	292,0	317.2	208.0	290.2	215,0	317.2	228.9	249.2	205.1	252.9	329.2	360.3	294,0	221.1	221.1	287,0	267.3	268.3	253.9	237,0	291.1
	lonization	ESI +	ESI +	ESI-	ESI +	ESI-	ESI-	ESI-	ESI-	ESI -	ESI-	ESI-	ESI-	ESI-	ESI-	ESI-	ESI +	ESI +	ESI +	ESI +	ESI +	ESI+
acitactor	time (min)	9.08	8.12	11.77	10.72	8.23	11.54	10.22	12.60	11.79	10.11	8.67	10.26	11.58	8.81	8.11	9.11	4.44	6.18	7.38	8.81	5.44
	linear range ng.L- <sup>1</sup>	250	250	2000	250	70-5000	20-1000	70-5000	20-1000	70-5000	20-1000	20-5000	20-1000	20-5000	20-1000	20-1000	20-1000	20-5000	20-5000	20-1000	20-1000	20-5000
	group	surrogate	surrogate	surrogate	surrogate	degradate	hypolipemiant	SNIA	hypolipemiant	SNIA	AINS	diuretics	hypolipemiant	SNIA	degradate	degradate	antidepressant	Beta-blockers	Beta-blockers	antibiotic	anti-epileptic	antibiotic
	Compounds	Oxazepam d5 (OXZ d5)	Sulfamethoxime d6 (SFX d6)	Ibuprofen d3 (IBU d3)	Diazepam d5 (DZP d5)	O Desmethylnaproxen	Fenofibric acid	Naproxen	Gemfibrozil	Ibuprofen	Ketoprofen	Furosemide	Bezafibrate	Diclofenac	1 hydroxy ibuprofen	2 hydroxy ibuprofen	Oxazepam	Atenolol	Metoprolol	Sulfamethoxazole	Carbamazepine	Trimethoprim

Table 2: Target pharmaceuticals and their optimized MS/MS parameters

	clay (%)	silt (%)	sand %	organic carbon (%)	pH water	pH KCI	CEC (meq/100g)
sediment B	1.2	3.6	94.9	0.163	7.74	90'2	1.92
Sediment C	0.4	2.1	97.4	0.053	7.52	99:9	1.10
Soil B	4.6	9.6	85.2	0.373	6.17	5.05	2.52
Soil C	7.9	16.2	75.1	0.506	6.64	5.73	4.82
Soil D	15.1	25.3	57.8	1.055	6.33	5.46	10.65

519 Table 3. Soil and river sediment characteristics

**Table 4.** Mean (± standard error) Average Exposure Concentration (µg Γ¹) for each active ingredient and for the different wheat crop protection programs scenario 1 to 4). From [16]. 522

Active		Scenario	ario	524
ingredient	_	5	ဇ	4
Azoxystrobin	1.49 ± 0.13	1.60 ± 0.11		
Bifenthrin	0.046 ± 0.004	0.046 ± 0.020		
lodosulfuron-methyl	$0.25 \pm 0.01$	0.28 ± 0.03		
Mesosulfuron-methyl	0.47 ± 0.01	0.37 ± 0.03		
Metconazole	1.53 ± 0.16	1.71 ± 0.21		
Prochloraz	$0.47 \pm 0.02$	0.74 ± 0.03		
Bromoxynil			0.19 ± 0.02	0.20 ± 0.03
Cyprodynil			74.20 ± 4.5	49.10 ± 4.4
loxynil			$0.12 \pm 0.02$	$0.12 \pm 0.02$
Prosulfocarb			2.87 ± 0.18	1.86 ± 0.09
Diflufenican	0.67 ± 0.01	0.57 ± 0.04	$0.10 \pm 0.005$	$0.12 \pm 0.008$
Isoproturon	12.90 ± 0.22	6.20 ± 0.26	4.90 ± 1.1	3.10 ± 0.06
Epoxiconazole	0.83 ± 0.07	0.89 ± 0.04	$0.27 \pm 0.04$	$0.20 \pm 0.05$

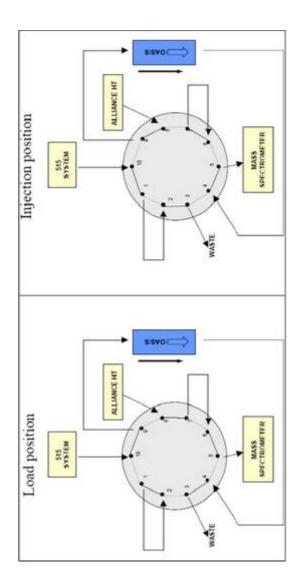


Figure 1: online SPE/UPLC/MS/MS set-up

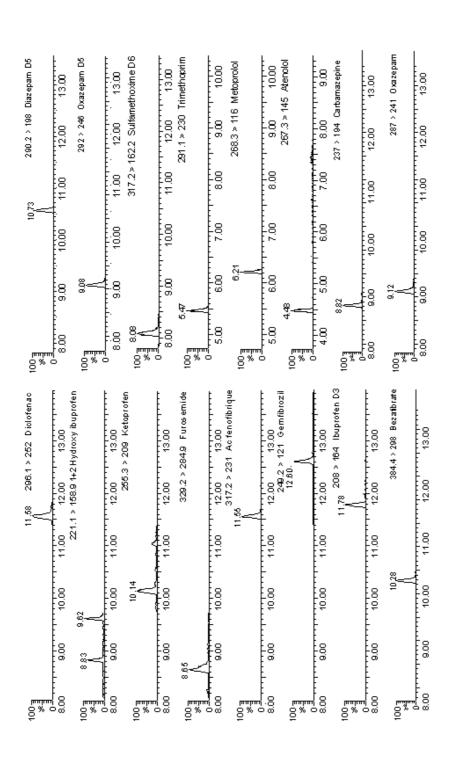


Figure 2; Chromatograms of pharmaceutical compounds obtained by online SPE/UPLC/MS/MS

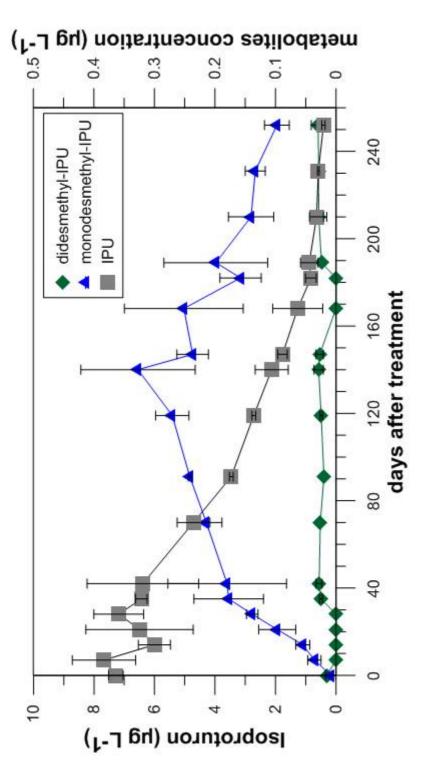


Figure 3: Monitoring of isoproturon and two degradates, concentrations in mesocosms. Results of the 3 replicates of the same scenario are shown

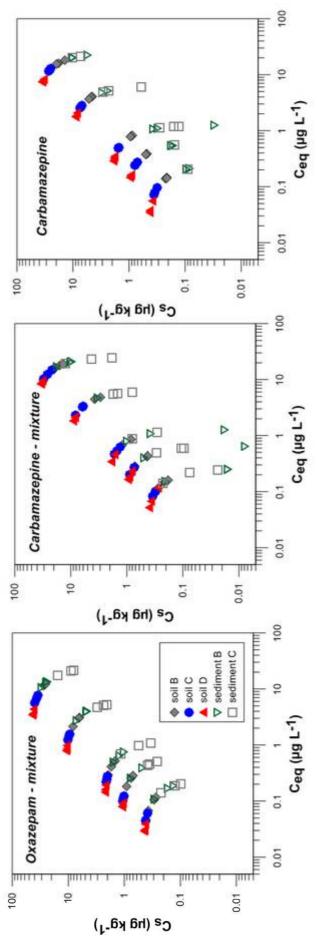


Figure 4: adsorption isotherms of oxazepam and carbamazepine studied as a mixture (with sulfamethoxazole) and carbamazepine studied alone

						Quantifier	fier					ď	Qualifier			
	chemical group	linear range ng.L-1	retention time (min)	lonization	Tran	Transition		cone Voltage	Collision Energy	lonization	Trar	Transition		cone Voltage	Collision Energy	Internal
Simazine D10 (SIM d10)	surrogate	250	4,08	ESI +	212,0	_ \	137,0	35	20	ESI +	212,0	٨	104,9	35	25	
Isoproturon D6 (IPU d6)	surrogate	250	4,47	ESI +	213,1	٨	6,77	30	18	ESI +	213,1	٨	171,0	30	15	
Isoproturon-didesmethyl	degradate	15-500	4,11	ESI +	179,1	^	137,0	30	12	ESI +	179,1	۸	93,9	30	20	IPU d6
Metsulfuron methyl	sulfonyl urea	15-500	4,17	ESI +	382,0		167,0	25	15	ESI-	379,9	٨	139,0	25	16	IPU d6
Isoproturon-monodesmethyl	degradate	15-500	4,30	ESI +	193,1	٨	93,9	25	20	ESI +	193,1	٨	151,1	25	12	IPU d6
Mesosulfuron methyl	sulfonyl urea	15-500	4,37	ESI+	504,1		182,0	35	20	ESI -	502,1	٨	347,0	30	15	IPU d6
lodosulfuron methyl	sulfonyl urea	15-500	4,41	ESI +	8,703	^	0,791	30	18	ESI-	506,2	٨	139,0	30	22	IPU d6
Isoproturon	urea	15-500	4,48	ESI +	207,0	٨	71,9	30	15	ESI +	207,0	۸	164,8	30	15	IPU d6
Bromoxynil	hydroxybenzonitriles	25-500	4,52	ESI-	275,8	٨	0,67	40	25	ESI-	273,8	۸	0,67	40	25	IPU d6
loxynil	hydroxybenzonitriles	25-500	4,81	ESI-	369,7	٧ 	127,0	40	30	ESI-	369,7	^	215,0	40	25	IPU d6
Prochloraz	Azole	15-500	4,95	ESI +	378,0	۸	309,9	20	10	ESI +	376,0	^	307,8	20	10	SIM d10
Cyprodinil	Pyrimidine	15-500	4,97	ESI +	226,1	٨	92,8	30	35	ESI +	226,1	٨	108,0	30	25	SIM d10
Azoxystrobin	Strobin	15-500	4,98	ESI +	403,9	^	372,0	30	15	ESI +	403,9	۸	329,1	30	30	SIM d10
Epoxiconazole	azole	15-500	5,01	ESI +	329,9	^	120,8	33	18	ESI +	329,9	٨	140,8	33	18	SIM d10
Boscalid	Anilide	15-500	5,07	ESI +	342,9	۸	307,0	30	19	ESI +	342,9	٨	271,5	30	32	SIM d10
Flusilazole	azole	15-500	5,15	ESI +	316,1	^	165,0	35	25	ESI +	316,1	^	247,2	35	15	SIM d10
Tebuconazole	azole	15-500	5,16	ESI +	307,9	٨	70,0	33	27	ESI +	307,9	^	124,7	33	31	SIM d10
Napropamide	amide	15-500	5,19	ESI +	271,8	^	171,1	26	18	ESI +	271,8	^	198,9	26	13	SIM d10
Metconazole	azole	15-500	5,38	ESI +	320,0	٨	6,69	37	20	ESI +	320,0	٨	124,8	37	40	SIM d10
Prosulfocarb	thiocarbamate	15-500	5,97	ESI +	251,8	٨	20,7	25	20	ESI +	251,8	٨	128,0	25	12	SIM d10

Table 1: Target pesticides and their optimized MS/MS parameters

						Quantifier	tifier					Qualifier	ier			
Compounds	group	linear range ng.L- <sup>1</sup>	retention time (min)	lonization	Trar	Transition		cone Voltage	Collision Energy	lonization	Tr	Transition	cone Voltage		Collision Energy	Internal standards
Oxazepam d5 (OXZ d5)	surrogate	250	80.6	ESI +	292,0	> 2	246,0	30	20	ESI +	292,0	> 214,0	0; 30	0	20	
Sulfamethoxime d6 (SFX d6)	surrogate	250	8.12	ESI +	317.2	۷	162.2	35	22	ESI +	317.2	> 155.8	35	LO	22	
Ibuprofen d3 (IBU d3)	surrogate	2000	11.77	-ISI	208.0		164.0	25	7			۸				
Diazepam d5 (DZP d5)	surrogate	250	10.72	ESI +	290.2	2	262.1	35	22	ESI +	290.2	> 198,	35	2	30	
O Desmethylnaproxen	degradate	70-5000	8.23	ESI-	215,0	7	170.9	25	12	ESI +						IBU d3
Fenofibric acid	hypolipemiant	20-1000	11.54	ESI-	317.2	7	231,0	25	10	ESI +	319,0	> 233.0	30	0	16	OXZ d5
Naproxen	AINS	70-5000	10.22	ESI-	228.9		84.8	25	7	ESI-	228.9	> 169.9	.9 25	2	15	DZP d5
Gemfibrozil	hypolipemiant	20-1000	12.60	ESI-	249.2		121,0	25	13	ESI-	249.2	> 127.1	.1 25	2	10	DZP d5
Ibuprofen	AINS	70-5000	11.79	ESI-	205.1		160.9	25	7	ESI +						IBU d3
Ketoprofen	AINS	20-1000	10.11	ESI-	252.9	> 2	209,0	25	8	ESI +	255.3	> 209.0	.0 30	0	12	DZP d5
Furosemide	diuretics	20-5000	8.67	ESI-	329.2	7	284.9	35	15	ESI-	329.2	> 204.8	.8 35	ω	20	DZP d5
Bezafibrate	hypolipemiant	20-1000	10.26	ESI-	360.3	> 2	274,0	30	17	ESI +	384.4	> 298.0	.0 35	2	17	OXZ d5
Diclofenac	AINS	20-5000	11.58	ESI-	294,0	> 2	250,0	25	12	ESI-	296.1	> 252,0	,0 25	2	12	DZP d5
1 hydroxy ibuprofen	degradate	20-1000	8.81	ESI-	221.1	> 1	176.9	25	2	ESI-	221.1	> 158.9	.9 25	2	12	IBU d3
2 hydroxy ibuprofen	degradate	20-1000	8.11	ESI-	221.1		176.9	25	8	ESI +						IBU d3
Oxazepam	antidepressant	20-1000	9.11	ESI +	287,0	> 2	241,0	30	20	ESI +	287,0	> 269,0	0,1	30	14	OXZ d5
Atenolol	Beta-blockers	20-5000	4.44	ESI +	267.3		190,0	30	18	ESI +	267.3	> 145,0	0,	30	23	OXZ d5
Metoprolol	Beta-blockers	20-5000	6.18	ESI +	268.3		6.061	35	18	ESI +	268.3	> 116,0	0,	35	18	OXZ d5
Sulfamethoxazole	antibiotic	20-1000	7.38	ESI +	253.9	^	91.8	30	26	ESI +	253.9	> 155.8	8:	30	17	SFX d6
Carbamazepine	anti-epileptic	20-1000	8.81	ESI +	237,0	_	194,0	25	18	ESI +	237,0	> 179,0	0,	25	33	SFX d6
Trimethoprim	antibiotic	20-5000	5.44	ESI +	291.1	^	122.9	42	24	ESI +	291.1	> 230,0	0,	42	24	SFX d6

Table 2: Target pharmaceuticals and their optimized MS/MS parameters

	clay (%)	silt (%)	sand %	organic carbon	pH water	PH KCI	CEC (mod/1004)
sediment B	1.2	3.6	94.9	0.163	7.74	7.06	1.92
Sediment C	0.4	2.1	97.4	0.053	7.52	99.9	1.10
Soil B	4.6	9.6	85.2	0.373	6.17	5.05	2.52
Soil C	7.9	16.2	75.1	0.506	6.64	5.73	4.82
Soil D	15.1	25.3	57.8	1.055	6.33	5.46	10.65

Table 3. Soil and river sediment characteristics

Active		Scenario	oirio	
ingredient	1	2	3	4
Azoxystrobin	$1.49 \pm 0.13$	$1.60 \pm 0.11$		
Bifenthrin	$0.046 \pm 0.004$	$0.046 \pm 0.020$		
Iodosulfuron-methyl	$0.25 \pm 0.01$	$0.28 \pm 0.03$		
Mesosulfuron-methyl	$0.47 \pm 0.01$	$0.37 \pm 0.03$		
Metconazole	$1.53 \pm 0.16$	$1.71 \pm 0.21$		
Prochloraz	$0.47 \pm 0.02$	$0.74 \pm 0.03$		
Bromoxynil			$0.19 \pm 0.02$	$0.20 \pm 0.03$
Cyprodynil			$74.20 \pm 4.5$	$49.10 \pm 4.4$
Ioxynil			$0.12 \pm 0.02$	$0.12 \pm 0.02$
Prosulfocarb			$2.87 \pm 0.18$	$1.86 \pm 0.09$
Diflufenican	$0.67 \pm 0.01$	$0.57 \pm 0.04$	$0.10\pm0.005$	$0.12 \pm 0.008$
Isoproturon	$12.90 \pm 0.22$	$6.20 \pm 0.26$	$4.90 \pm 1.1$	$3.10 \pm 0.06$
Epoxiconazole	$0.83 \pm 0.07$	$0.89 \pm 0.04$	$0.27 \pm 0.04$	$0.20 \pm 0.05$

**Table 4.** Mean (± standard error) Average Exposure Concentration (µg l<sup>-1</sup>) for each active ingredient and for the different wheat crop protection programs scenario 1 to 4). From [16].