



**HAL**  
open science

## Thermodynamics of saline aqueous solutions

Laurent André, Arnault Lassin, Adeline Lach, Mohamed Azaroual

► **To cite this version:**

Laurent André, Arnault Lassin, Adeline Lach, Mohamed Azaroual. Thermodynamics of saline aqueous solutions. ESAT 2021, Jul 2021, Paris, France. hal-03474598

**HAL Id: hal-03474598**

**<https://brgm.hal.science/hal-03474598v1>**

Submitted on 10 Dec 2021

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Choisissez un élément. **Methodology:** **Oral**  
**Thermophysical Properties**  
**(experiment & modeling)**

---

## THERMODYNAMICS OF SALINE AQUEOUS SOLUTIONS

**Laurent ANDRE 1,2, Arnault LASSIN 1, Adeline LACH 1, Mohamed AZAROUAL 1,2**

BRGM, Water, Environment, Process Development and Analysis Division, 3 Avenue C. Guillemin, Orléans, France<sup>1</sup>, ISTO, UMR7327, Université d'Orléans, CNRS, BRGM, F-45071 Orléans, France<sup>2</sup>

Corresponding author e-mail: l.andre@brgm.fr

Natural brines are of major interest for industrial developments, because of their valuable properties and/or because of the technical problems they cause in the georesource production processes. Valorization concerns the extraction of valuable dissolved species (lithium of the salts, potassium, boron, magnesium, ...), the recovery of chemical reactants from industrial waste, the exploitation of water resources (desalination) and of deep saline aquifers (CO<sub>2</sub> storage, geothermal energy, oil and gas exploration ...). The industrial problems caused by brines are in relation with the management of deposits, the scaling/corrosion in tubings during the exploitation of geothermal fluids and oil brines and the reservoir management especially the near wellbore domains.

Optimizing these applications implies a better control of the electrolyte solution properties, which means a better knowledge of activity of the dissolved species, salt solubility, heat capacity (heat exchanges), interfacial tension and wettability (flow, scalings), density, refractive index, speed of sound, etc. However, because of the high ionic strengths of these solutions, the description and the modelling of their physicochemical properties still remain a scientific challenge.

The Pitzer formalism<sup>(1)</sup> uses the derivative of the Gibbs excess energy ( $G^{\text{ex}}$ ) to reach the excess properties of brines like (i) the osmotic coefficient ( $\phi$ ), (ii) the apparent relative molar enthalpy ( $L_{\phi}$ ), (iii) the apparent molar heat capacity ( $C_{p,\phi}$ ) and (iv) the apparent molar volume ( $V_{\phi}$ ). From the last three expressions, we can calculate the dilution enthalpy ( $\Delta H^{\text{D}}$ ), the heat capacity ( $C_p$ ) and the density ( $\rho$ ) of a solution, respectively. A numerical code, derived from PhreeqC<sup>(2)</sup> and called PhreeSCALE<sup>(3)</sup>, has been developed to address all these sensitive thermodynamic properties of brine solutions (Figure 1).

The software is used with success to simulate various applications. The presentation will include application cases, the state-of-the-art but also the remaining scientific locks that need to be addressed to accurately characterize and predict the behavior of such brines in environmental and industrial processes. One of the most challenging issue is the characterization and the numerical description of systems of highly contrasted solubility, like aluminosilicate minerals in brines.

### References:

- (1) Pitzer K.S., 1991. Activity coefficients in electrolyte solutions, CRC Press, Boca Raton.
- (2) Parkhurst D.L., Appelo C.A.J., 2013. Description of Input and Examples for PHREEQC Version 3—A Computer Program for Speciation, Batch-Reaction, One-Dimensional Transport, and Inverse Geochemical Calculations.
- (3) Lach A., Boulahya F., André L., Lassin A., Azaroual M., Serin J.-P., Cézac P., 2016. Thermal and volumetric properties of complex aqueous electrolyte solutions using the Pitzer formalism - The PhreeSCALE code, *Comput. Geosci.*, 92, 58–69.
- (4) Lach A., Ballerat-Busserolles K., André L., Simond M., Lassin A., Cézac P., Neyt J.-C., Serin J.-P., 2017. Experimental Data and Modeling of Solution Density and Heat Capacity in the Na–K–Ca–Mg–Cl–H<sub>2</sub>O System up to 353.15 K and 5 mol·kg<sup>-1</sup> Ionic Strength. *J. Chem. Eng. Data*, 62, 3561–3576.

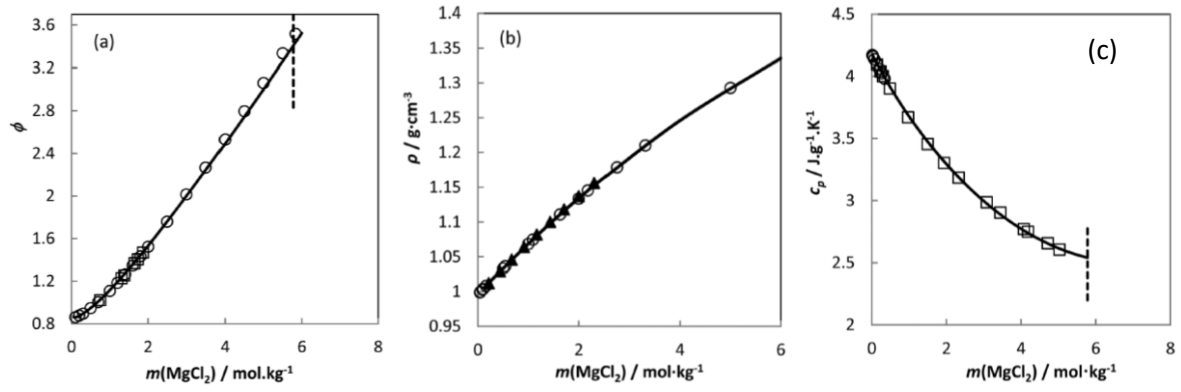


Figure 1: The Mg-Cl-H<sub>2</sub>O system at 298.15 K. (a) osmotic coefficient ; (b) brine density; (c) heat capacity. Symbols are experimental data, full lines are model results (4).